


SAW Bandpass Filter 201315B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

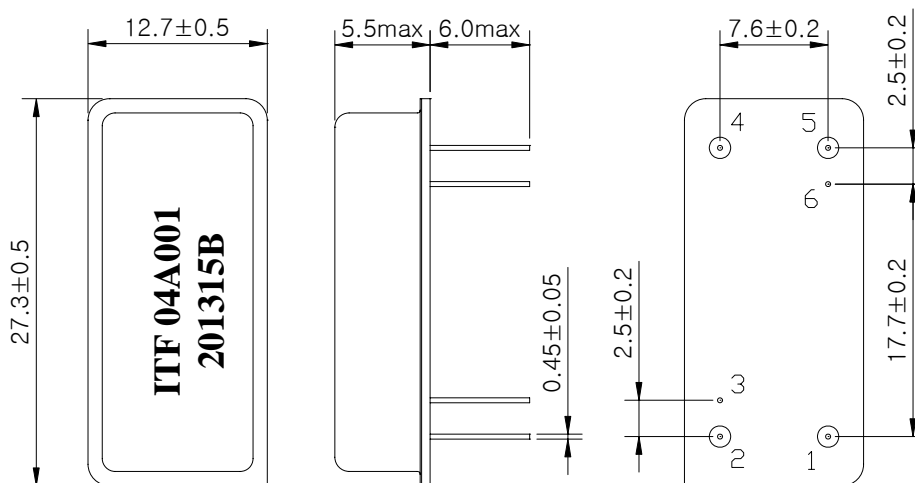

Package : D2712

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201315B	
		Rev. Date	2004-03-31	
		Rev.	NW3017-C02	1/5

SAW Bandpass Filter 201315B



3. Specifications

Fo = 140 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	140.0	-
Insertion Loss	dB	-	23.0	25.0
1dB Bandwidth	MHz	-	3.62	-
3dB Bandwidth	MHz	3.8	3.9	4.2
40dB Bandwidth	MHz	-	4.94	5.2
Amplitude Ripple (Fo +/- 1.65 MHz)	dB	-	0.6	0.9
Group Delay Variation (Fo +/- 1.65 MHz)	nsec	-	120	180
Absolute Delay	usec	-	2.52	-
Ultimate Rejection	dB	45	50	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201315B	
		Rev. Date	2004-03-31	
		Rev.	NW3017-C02	2/5

SAW Bandpass Filter 201315B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

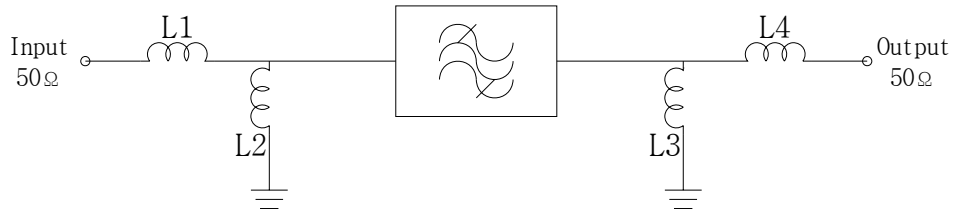


L1 = 100 nH, L4 = 150 nH
L2 = 180 nH L3 = 180 nH

5. Marking Configuration

ITF¹⁾04A001²⁾
201315B³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201315B	
		Rev. Date	2004-03-31	
		Rev.	NW3017-C02	3/5

SAW Bandpass Filter 201315B



6. Typical Performance (at +25°C)

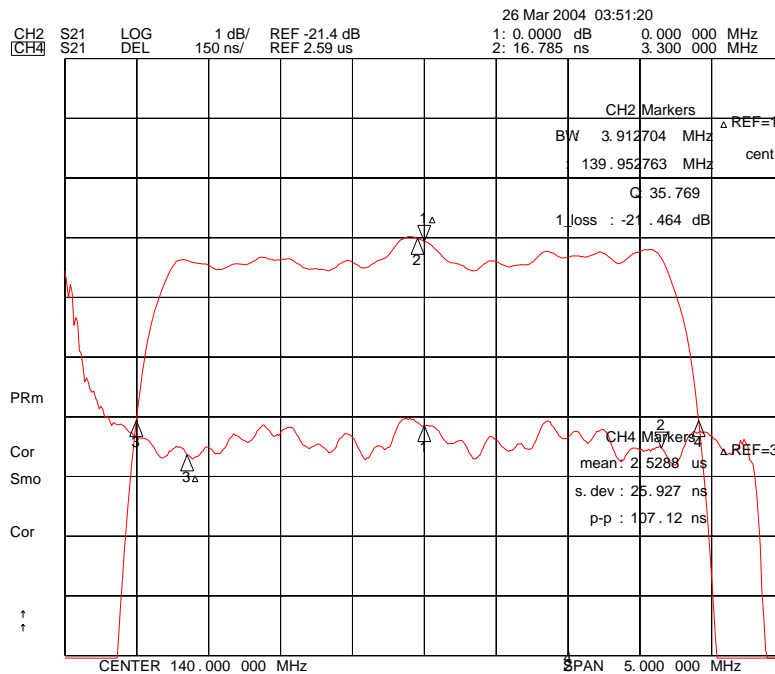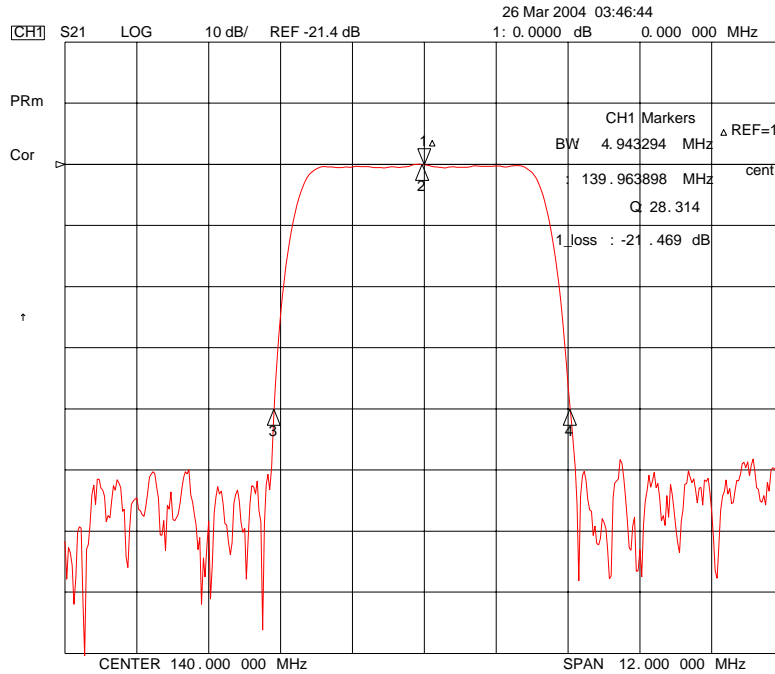


ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No. 201315B




Rev. Date 2004-03-31

Rev. NW3017-C02 4/5

SAW Bandpass Filter 201315B

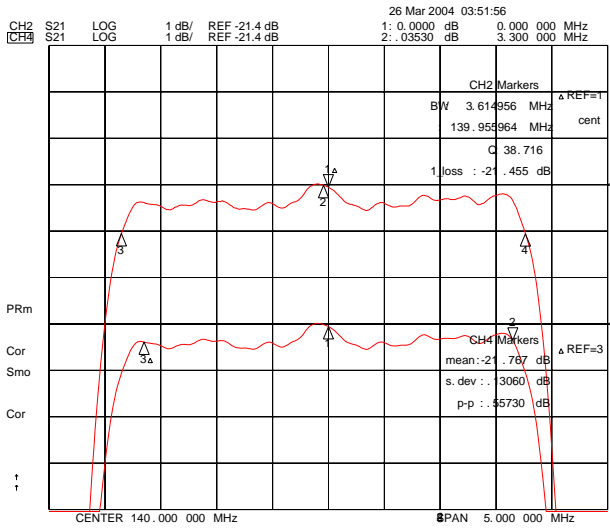

c

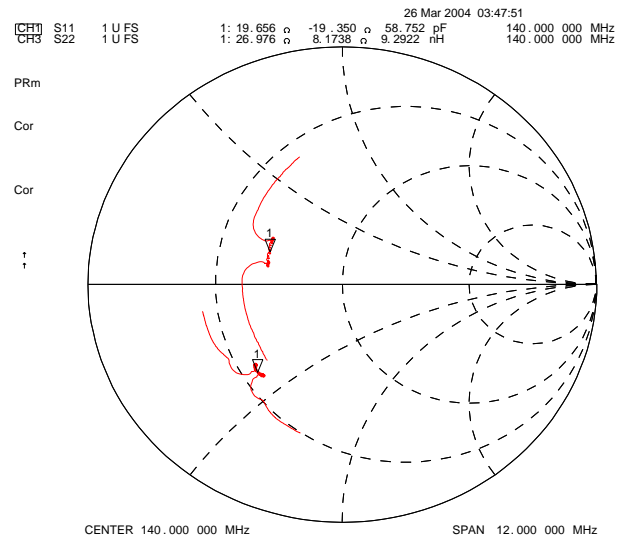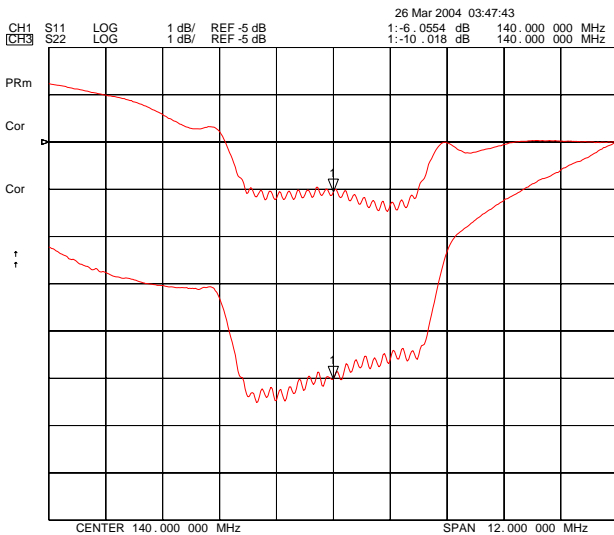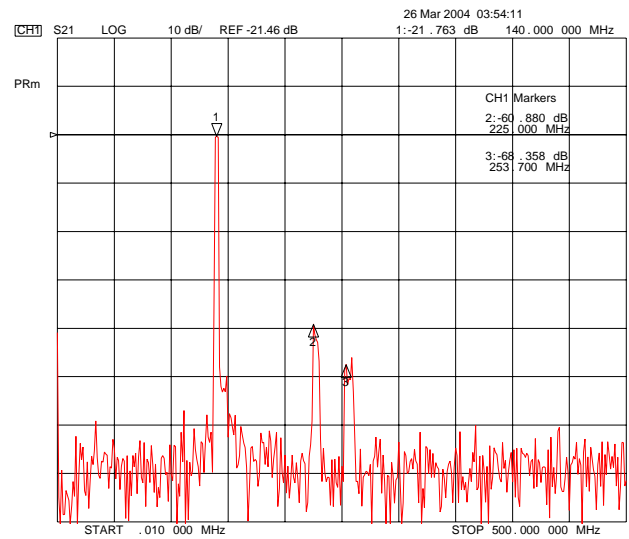

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	201315B	
Rev. Date	2004-03-31	
Rev.	NW3017-C02	5/5