


SAW Bandpass Filter F8681



Features

- RF bandpass filter
- High attenuation
- Usable bandwidth 4MHz
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device (SMD) Package

Package Dimensions

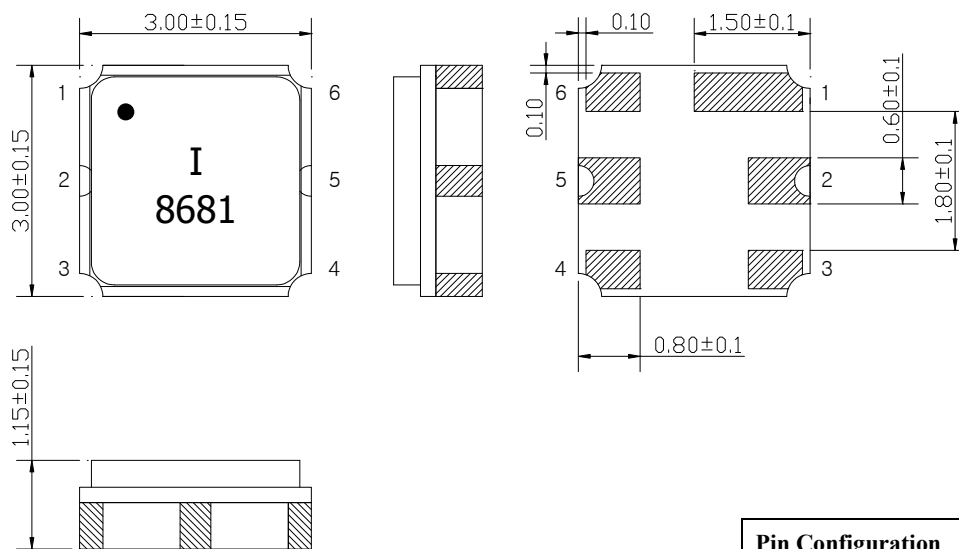

Dimensions shown are nominal in millimeters

Body : Al_2O_3 Ceramic

Lid : Kovar, Ni Plated


Terminations : Au plating 0.3 ~ 1.0 μm , Over a 1.27 ~ 8.89 μm Ni Plating

| Pin Configuration | |
|-------------------|-------------|
| 2 | Input |
| 5 | Output |
| 1, 3, 4, 6 | Case ground |

Maximum Ratings

| Parameter | Unit | Minimum | Typical | Maximum |
|-----------------------------|--------------------|---------|---------|---------|
| Operating Temperature Range | $^{\circ}\text{C}$ | -20 | 25 | 50 |
| Storage Temperature Range | $^{\circ}\text{C}$ | -40 | - | 85 |
| Power Handling Capability | dBm | - | - | 22 |

Electrostatics Sensitive Device (ESD)

| | | | | |
|---|---|-----------|-------------|-----|
|  | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | F8681 | |
| | | Rev. Date | 2011-1-4 | |
| | | Rev. | NS6008-AS04 | 1/7 |

SAW Bandpass Filter F8681



Specifications

$F_c = 868.0\text{MHz}$


Terminating source impedance : 50Ω

Terminating load impedance : 50Ω

| | | Minimum | Typical | Maximum |
|---------------------------------------|-----|---------|---------|---------|
| Center Frequency (F_c) | MHz | - | 868.0 | - |
| Insertion Loss ($F_c \pm 2.0$ MHz) | dB | - | 4.0 | 4.5 |
| Amplitude Ripple ($F_c \pm 2.0$ MHz) | dB | - | 0.5 | 1.0 |
| VSWR ($F_c \pm 2.0$ MHz) | | - | 1.5 | 2.0 |
| Relative Attenuation | | | | |
| 468.0 MHz ~ 827.0 MHz | dB | 40 | 50 | - |
| 918.0 MHz ~ 1268.0 MHz | | 40 | 50 | |

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances


| | | | | |
|---|---|-----------|-------------|-----|
|  | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | F8681 | |
| | | Rev. Date | 2011-1-4 | |
| | | Rev. | NS6008-AS04 | 2/7 |

SAW Bandpass Filter F8681



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

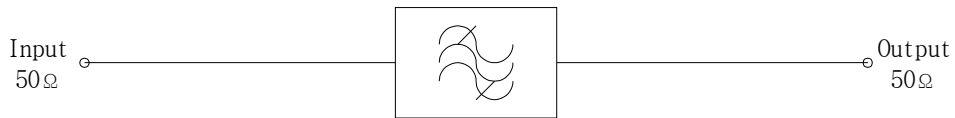

Marking Configuration


- ¹⁾
I ²⁾
8681 ³⁾

1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number



* Ink or Laser Marking available

| | | | | |
|---|---|-----------|-------------|-----|
|  Integrated Technology Future | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | F8681 | |
| | | Rev. Date | 2011-1-4 | |
| | | Rev. | NS6008-AS04 | 3/7 |

SAW Bandpass Filter F8681



Typical Performance (at 25°C)

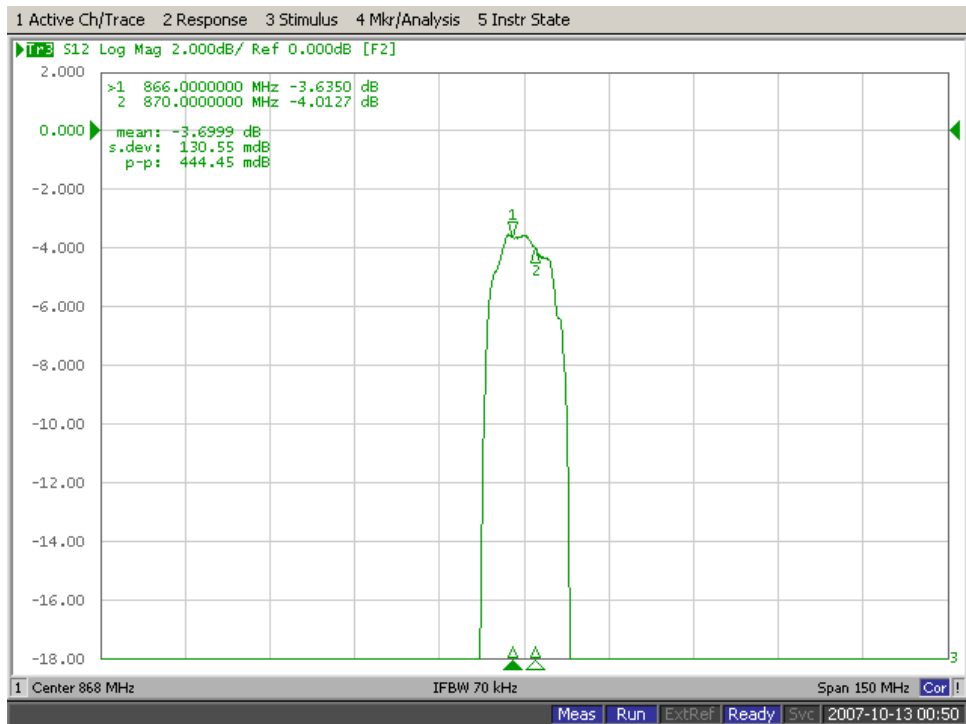
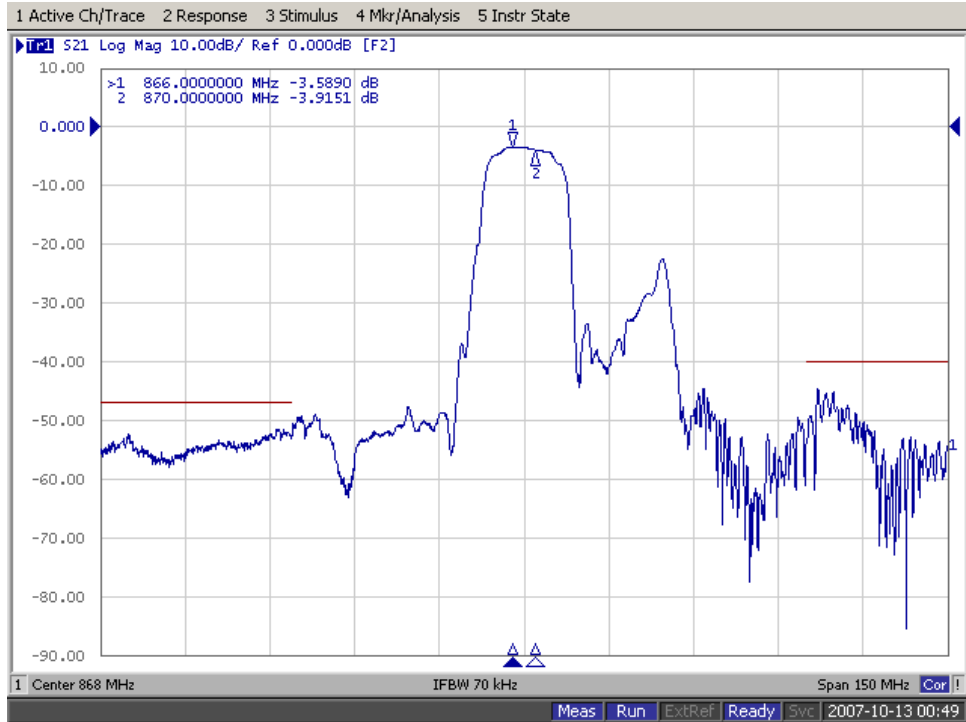


| | | | | |
|--|---|-----------|-------------|-----|
| | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | F8681 | |
| | | Rev. Date | 2011-1-4 | |
| | | Rev. | NS6008-AS04 | 4/7 |



SAW Bandpass Filter F8681



Input / Output VSWR Charts

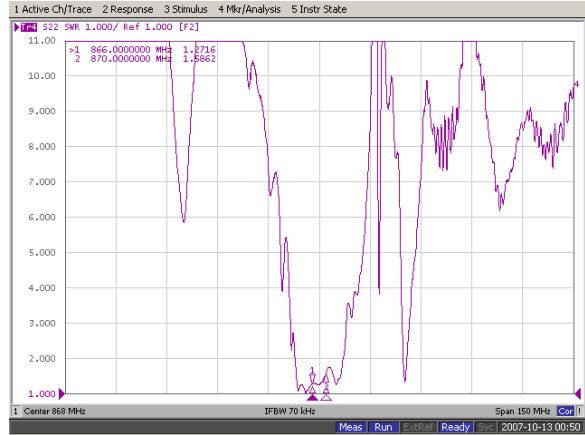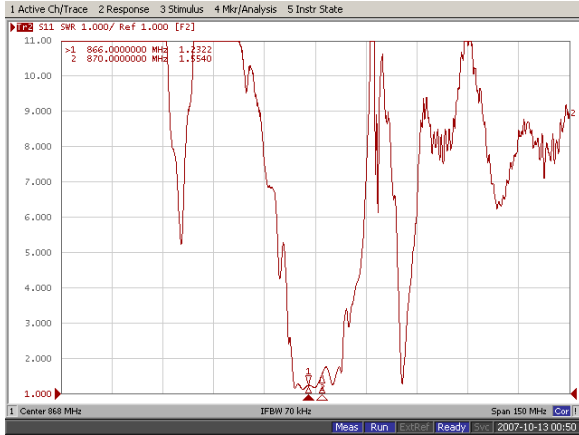

Input / Output Smith Charts

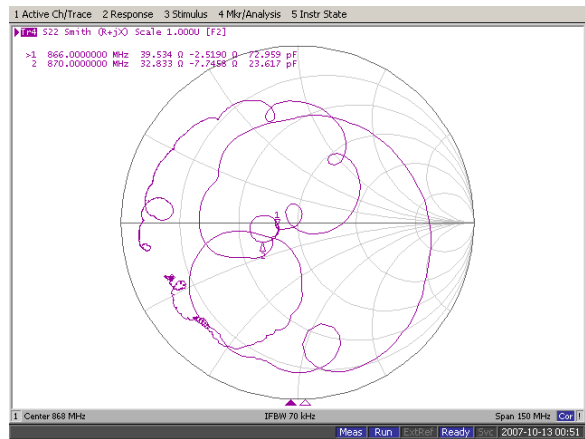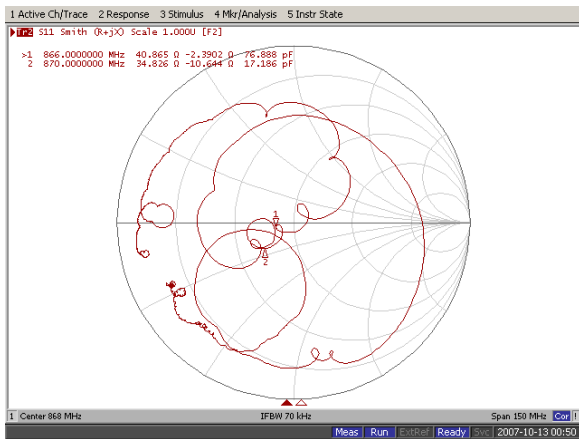


| | | | | |
|--|---|-----------|-------------|-----|
| | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | F8681 | |
| | | Rev. Date | 2011-1-4 | |
| | | Rev. | NS6008-AS04 | 5/7 |

SAW Bandpass Filter F8681




Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

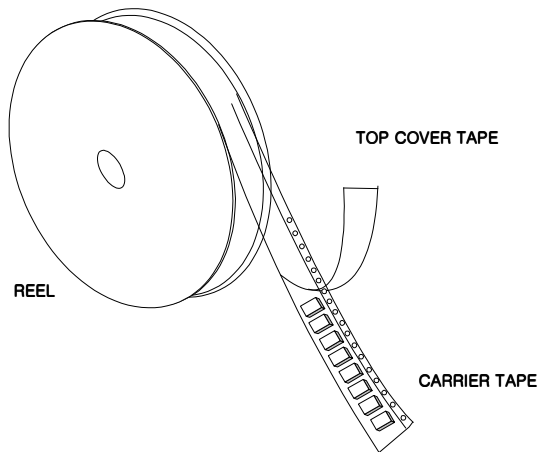

Tape Specification

1. Leader part and vacant position specification

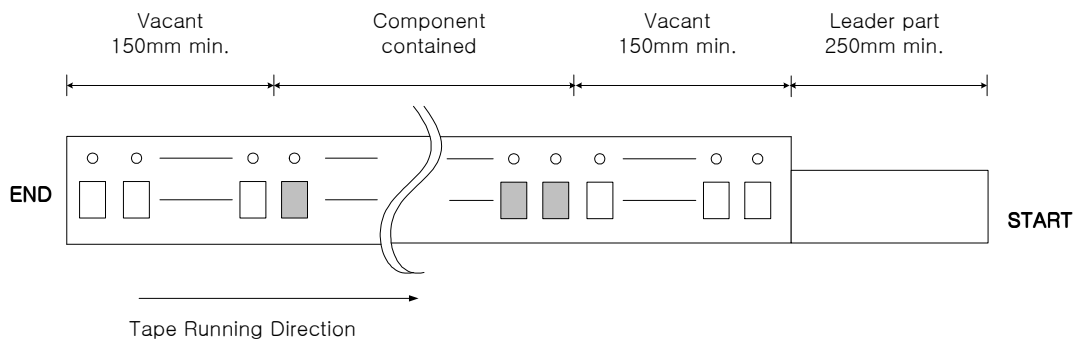


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

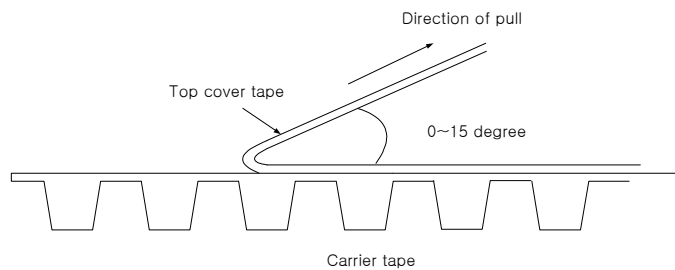


| | | | | |
|--|---|-----------|-------------|-----|
| | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | F8681 | |
| | | Rev. Date | 2011-1-4 | |
| | | Rev. | NS6008-AS04 | 6/7 |

SAW Bandpass Filter F8681




Carrier Tape Dimensions [unit : mm]

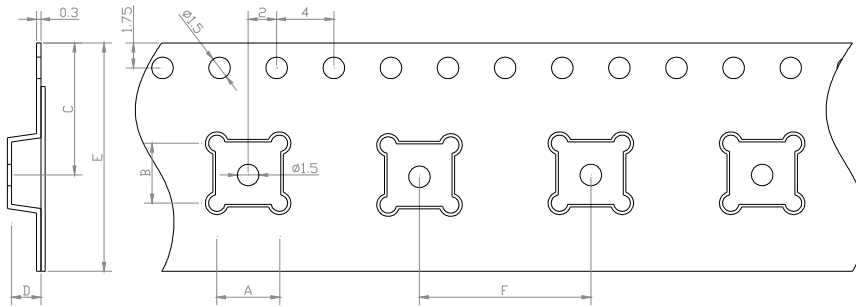



| | |
|---|-------------|
| A | 3.40 ± 0.1 |
| B | 3.40 ± 0.1 |
| C | 7.25 ± 0.1 |
| D | 1.70 ± 0.1 |
| E | 12.00 ± 0.1 |
| F | 8.00 ± 0.1 |

Part Direction

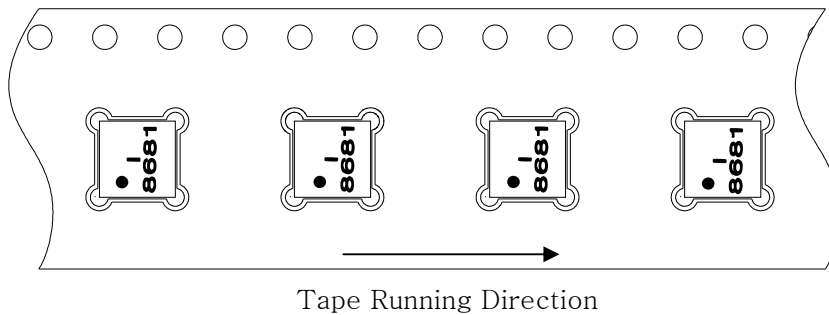

Reel Dimensions [unit : mm]

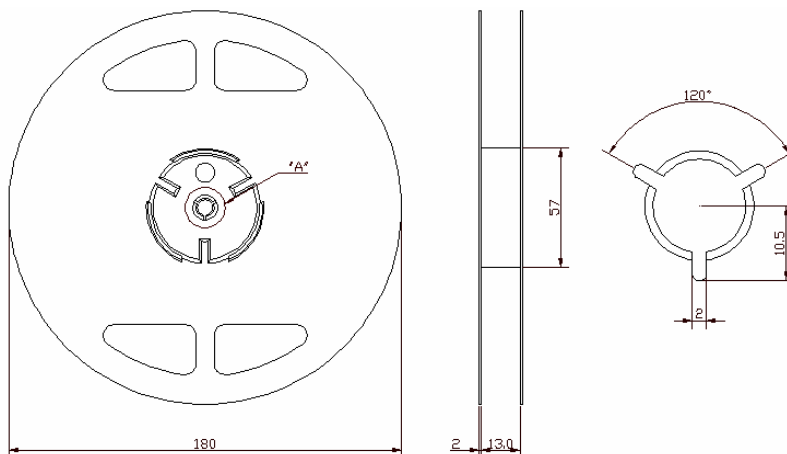

| | | | | |
|---|---|-----------|-------------|-----|
|  | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | F8681 | |
| | | Rev. Date | 2011-1-4 | |
| | | Rev. | NS6008-AS04 | 7/7 |