


# Ceramic Bandpass Filter IFD20030

## Features

- Ceramic bandpass filter
- 50Ω single-ended operation
- Surface Mounted Module Package (25.4mm × 11mm × 4.9mm )


## Package Dimensions

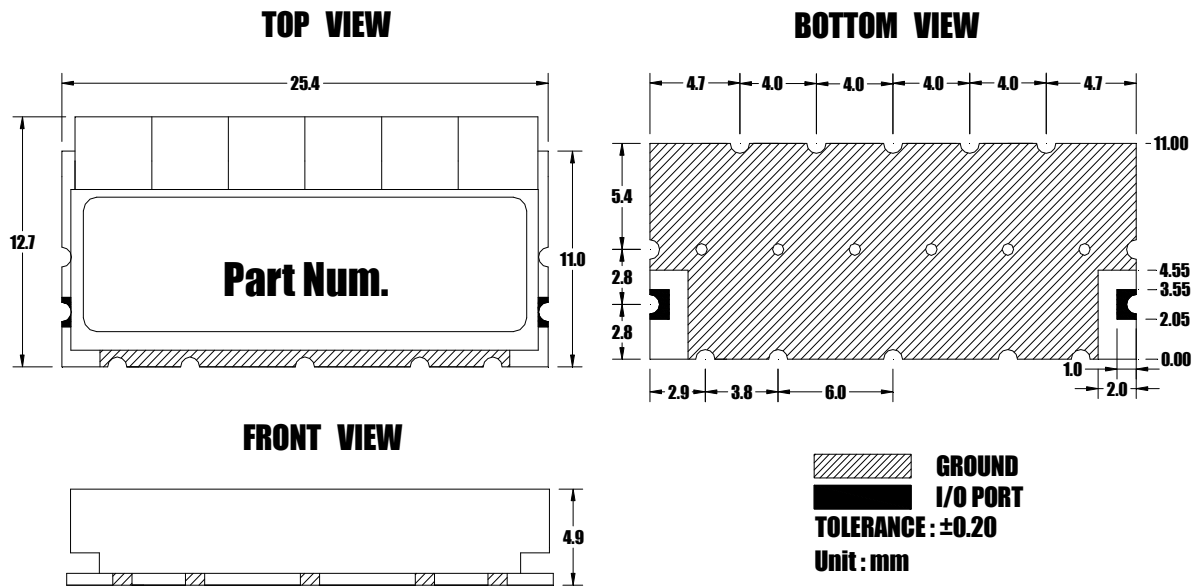

## Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	-30	25	70
Storage Temperature Range	℃	-40	25	85
Power Handling Capability	Watt	-	-	2

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFD20030	
		Rev. Date	2014-08-28	
		Rev.	AS 01	1/3

# Ceramic Bandpass Filter IFD20030


## Specifications

F<sub>o</sub> = 2000MHz

	Minimum	Typical	Maximum	Unit
Center Frequency ( F <sub>o</sub> )	-	2000	-	MHz
Insertion Loss (1990~ 2010MHz)	-	4.8	5.0	dB
Amplitude Ripple (1990~ 2010MHz)	-	0.3	0.5	dB
Return Loss (1990~ 2010MHz)	15	20	-	dB
Relative Attenuation 0.3 ~ 1900 MHz 2100 ~ 4200 MHz	65.0 60.0	70.0 65.0	- -	dB
Input/Output Impedance		50		Ohm

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFD20030	
		Rev. Date	2014-08-28	
		Rev.	AS 01	2/3

# Ceramic Bandpass Filter IFD20030

---

## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )




## Marking Configuration

Part Num. <sup>1)</sup>

1) Part Number

\* Ink or Laser Marking available

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFD20030	
		Rev. Date	2014-08-28	
		Rev.	AS 01	3/3