
Ceramic Bandpass Filter IFD03858

Features

- Ceramic bandpass filter
- 50Ω single-ended operation
- Surface Mounted Module Package (20mm $\times 24$ mm $\times 9.5$ mm)

Package Dimensions

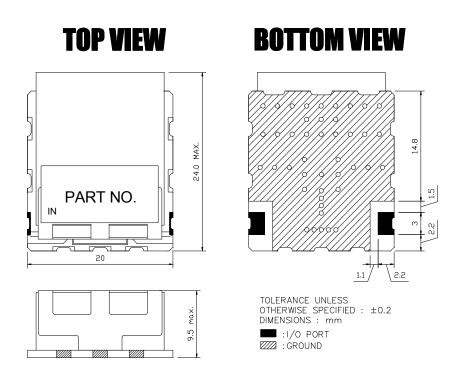

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	25	85
Storage Temperature Range	°C	-40	25	85
Power Handling Capability	Watt	-	-	3

Electrostatics Sensitive Device (ESD)



	ITF Co., Ltd.	Part No.	IFD0385	58
	102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City,	Rev. Date	2014-09-04	
е	Gyounggi-Do, Korea 421-809	Rev.	AS 01	1/4

Specifications

Fo = 382.5MHz

	Minimum	Typical	Maximum	Unit
Center Frequency (Fo)	-	382.5	-	MHz
Insertion Loss (380 ~ 385MHz)	-	2.5	3.0	dB
Amplitude Ripple (380 ~ 385MHz)	-	1.5	2.0	dB
Return Loss (380 ~ 385MHz)	15	18	-	dB
Relative Attenuation 390 ~ 395 MHz	30.0	35.0	-	dB
Input/Output Impedance		50		Ohm

Notes :

1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and

full 2 port calibration.

- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss

ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyounggi-Do, Korea 421-809	,	Part No.	IFD0385	58
	Rev. Date	2014-09-04		
	Rev.	AS 01	2/4	

Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)




Marking Configuration


Part No.¹⁾

1) Part Number

* Ink or Laser Marking available

ITF Co., Ltd.102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyounggi-Do, Korea 421-809	Part No.	IFD03858	
	Rev. Date	2014-09-	04
	Rev.	AS 01	3/4



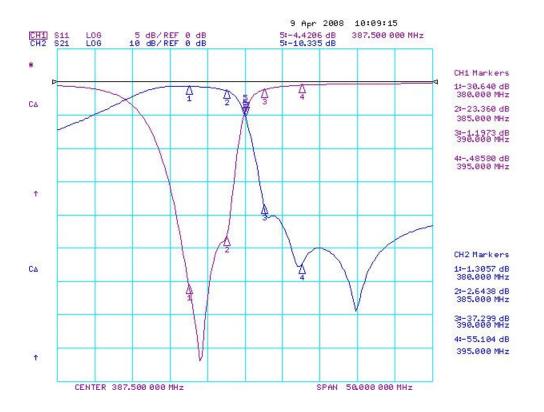

ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyounggi-Do, Korea 421-809	,	Part No.	IFD03858	
	Rev. Date	2014-09-04		
		Rev.	AS 01	4/4