

## 1. Features

- Typical 1dB bandwidth of 9.4 MHz
- High attenuation
- Single Ended Operation
- Dual In-line Package (DIP)

**RoHS Compliant**

Tested by SGS Testing Korea


## 2. Electrical Specifications

Source and Load Impedance = 50Ω

Room Temperature : +25°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	110.0	-
Insertion Loss	dB	-	26.0	27.5
1dB Bandwidth	MHz	9.25	9.43	-
3dB Bandwidth	MHz	-	9.6	-
20dB Bandwidth	MHz	-	10.15	-
40dB Bandwidth	MHz	-	10.48	10.65
Amplitude Ripple (fo ± 4.51 MHz)	dB	-	0.68	1.2
Group Delay Variation (fo ± 4.51 MHz)	nsec	-	103	200
Absolute Delay	usec	-	2.52	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C	-	-18	-
Relative Attenuation @edge ± 0.555MHz	dBc	-	20	-

@Edge : 9.02MHz

### D2012 Package Dimension

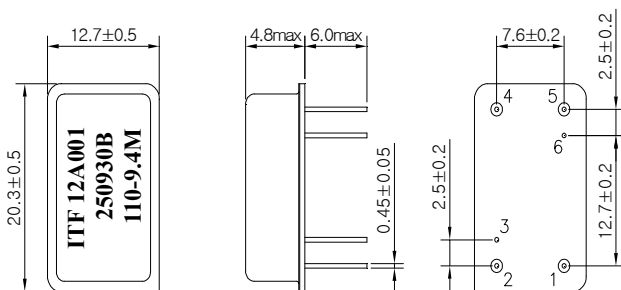


Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated  
 Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

### Matching Network Configuration

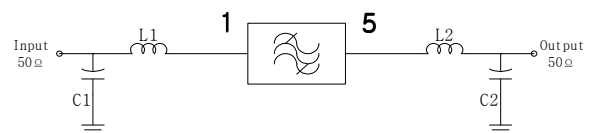

L1 = 27nH, L2 = 68nH,

C1 = 91nH, C2 = 51pF

### Pin Configuration

Pin Configuration			
Input	1	Ground	2,4
Output	5	Others	Ground

### 3. Typical Performance ( at +25°C )

