

1. Features

- Typical 1dB bandwidth of 9.3 MHz
- High attenuation
- Single Ended Operation
- Surface Mounted Package (SMD)

RoHS Compliant


Tested by SGS Testing Korea

2. Electrical Specifications

Source and Load Impedance = 50Ω

Room Temperature : +25°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	190.0	-
Insertion Loss	dB	-	22.5	24.5
1dB Bandwidth	MHz	9.2	9.36	-
3dB Bandwidth	MHz	-	9.54	-
40dB Bandwidth	MHz	-	10.98	11.1
Amplitude Ripple (fo ± 4.51 MHz)	dB	-	0.65	1.2
Group Delay Variation (fo ± 4.51 MHz)	nsec	-	85	150
Absolute Delay	usec	-	1.75	-
Ultimate Rejection	dB	40	48	-
Temperature Coefficient of Frequency	ppm/°C	-	-18	-

S1365 Package Dimension

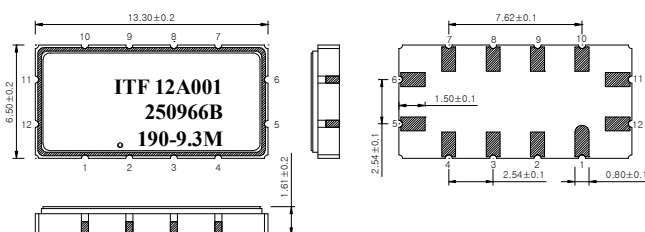


Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Matching Schematic

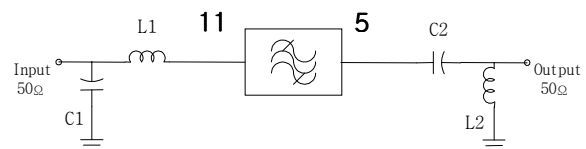

L1 = 15nH, L2 = 15nH, C1 = 27pF, C2 = 82pF

Pin Configuration

Pin Configuration			
Input	11	Ground	6,12
Output	5	Others	Ground

3. Typical Performance (at +25°C)

