


SAW Bandpass Filter F3253



Features

- RF bandpass filter
- Usable bandwidth 4.0 MHz
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device (SMD) Package (5.0mm * 5.0mm)
- RoHS/RoHS2 (2015/863/EU) Compliant

Package Dimensions

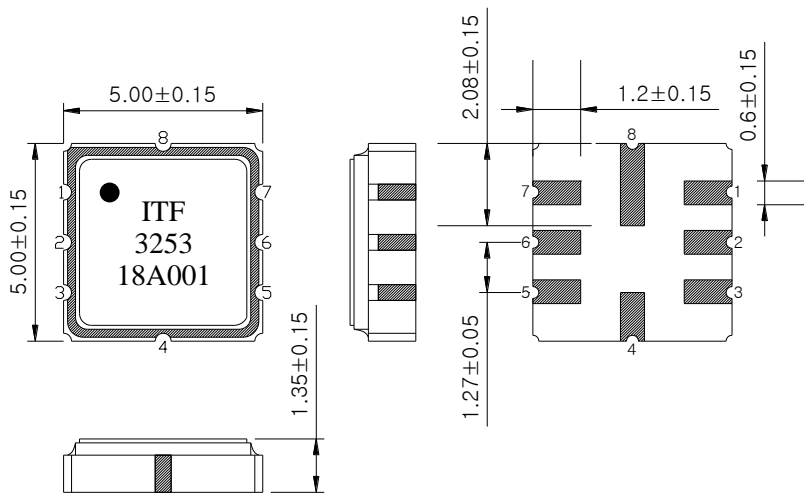

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated


Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um Ni Plating

Pin Configuration	
2	Input
6	Output
1, 3, 4, 5, 7, 8	Ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	25	80
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F3253	
		Rev. Date	2021-02-16	
		Rev.	NRTF03-AS03	1/8

SAW Bandpass Filter F3253




Specifications

$F_c = 325.0 \text{ MHz}$

		Minimum	Typical	Maximum
Center Frequency (F_c)	MHz	-	325	-
Insertion Loss ($F_c \pm 2.0 \text{ MHz}$)	dB	-	2.0	3.5
Amplitude Ripple ($F_c \pm 2.0 \text{ MHz}$)	dB	-	0.6	1.5
VSWR ($F_c \pm 2.0 \text{ MHz}$)		-	1.5	2.0
Absolute Attenuation				
225.0 ~ 305.0 MHz	dB	35	45	-
350.0 ~ 425.0 MHz		35	50	-

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances

 Integrated Technology Future	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F3253	
		Rev. Date	2021-02-16	
		Rev.	NRTF03-AS03	2/8

SAW Bandpass Filter F3253



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

- ¹⁾
ITF ²⁾
3253 ³⁾
18A001 ⁴⁾


1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number

4) Lot Number



* Ink or Laser Marking available


 Integrated Technology Future	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F3253	
		Rev. Date	2021-02-16	
		Rev.	NRTF03-AS03	3/8

SAW Bandpass Filter F3253



Typical Performance (at 25°C)

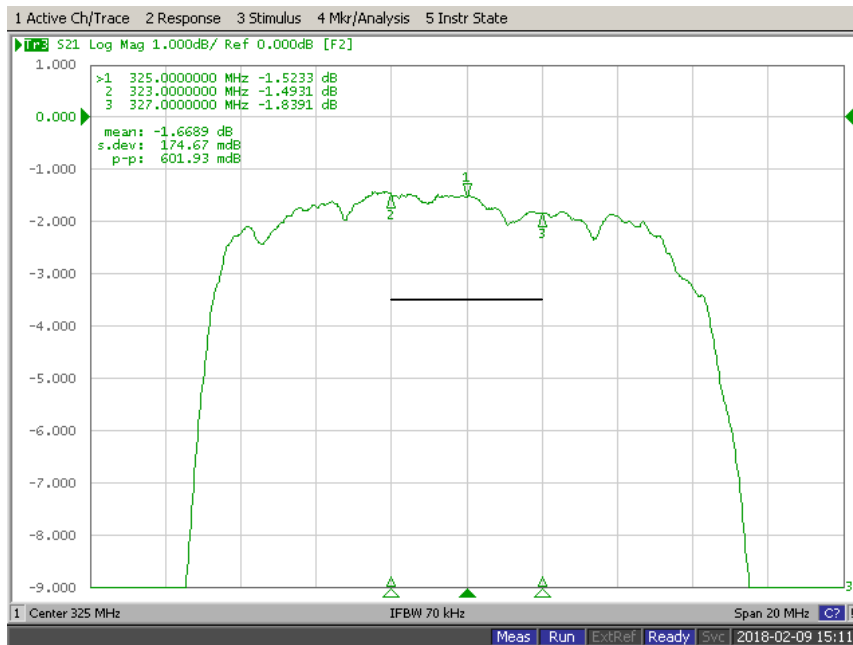
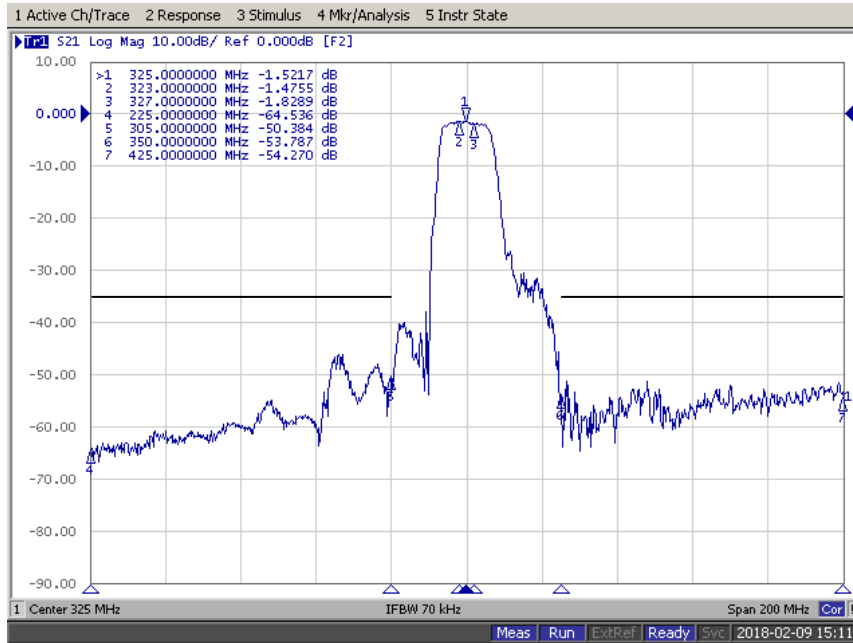


 Integrated Technology Future	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F3253	
		Rev. Date	2021-02-16	
		Rev.	NRTF03-AS03	4/8



SAW Bandpass Filter F3253



Input / Output VSWR Charts

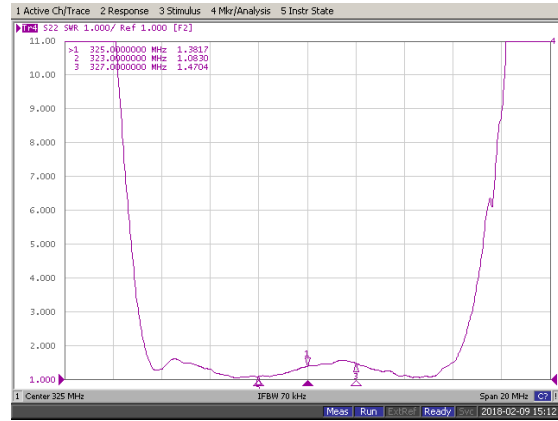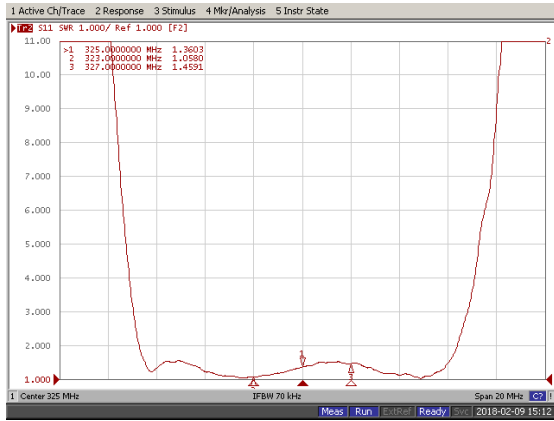

Input / Output Smith Charts

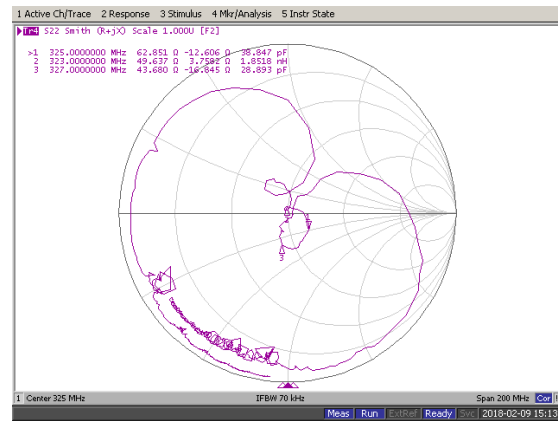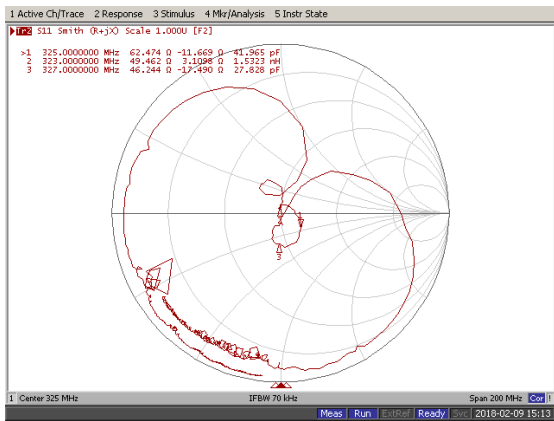


	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F3253	
		Rev. Date	2021-02-16	
		Rev.	NRTF03-AS03	5/8

SAW Bandpass Filter F3253




Packing Specification

1. Reeling Quantity : 1000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

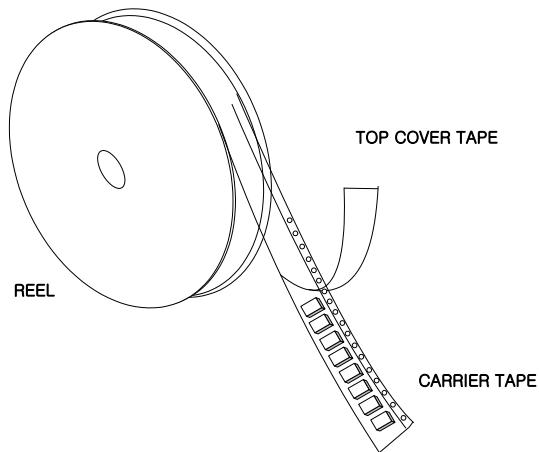

Tape Specification

1. Leader part and vacant position specification

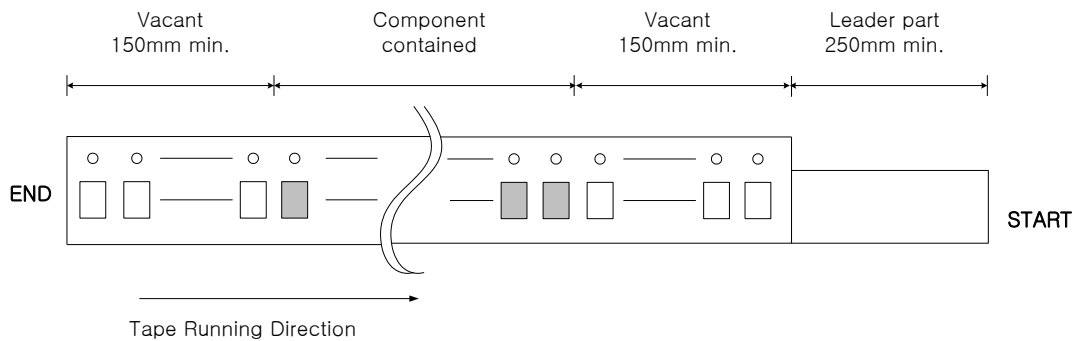


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

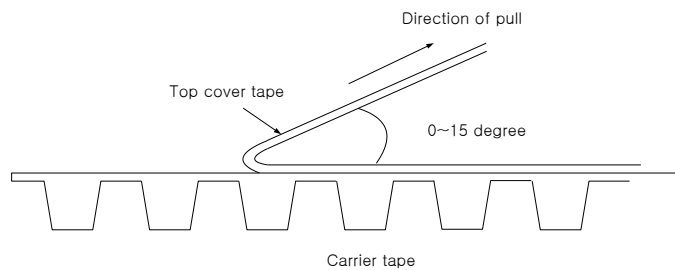


	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F3253	
		Rev. Date	2021-02-16	
		Rev.	NRTF03-AS03	6/8

SAW Bandpass Filter F3253



Reflow Condition

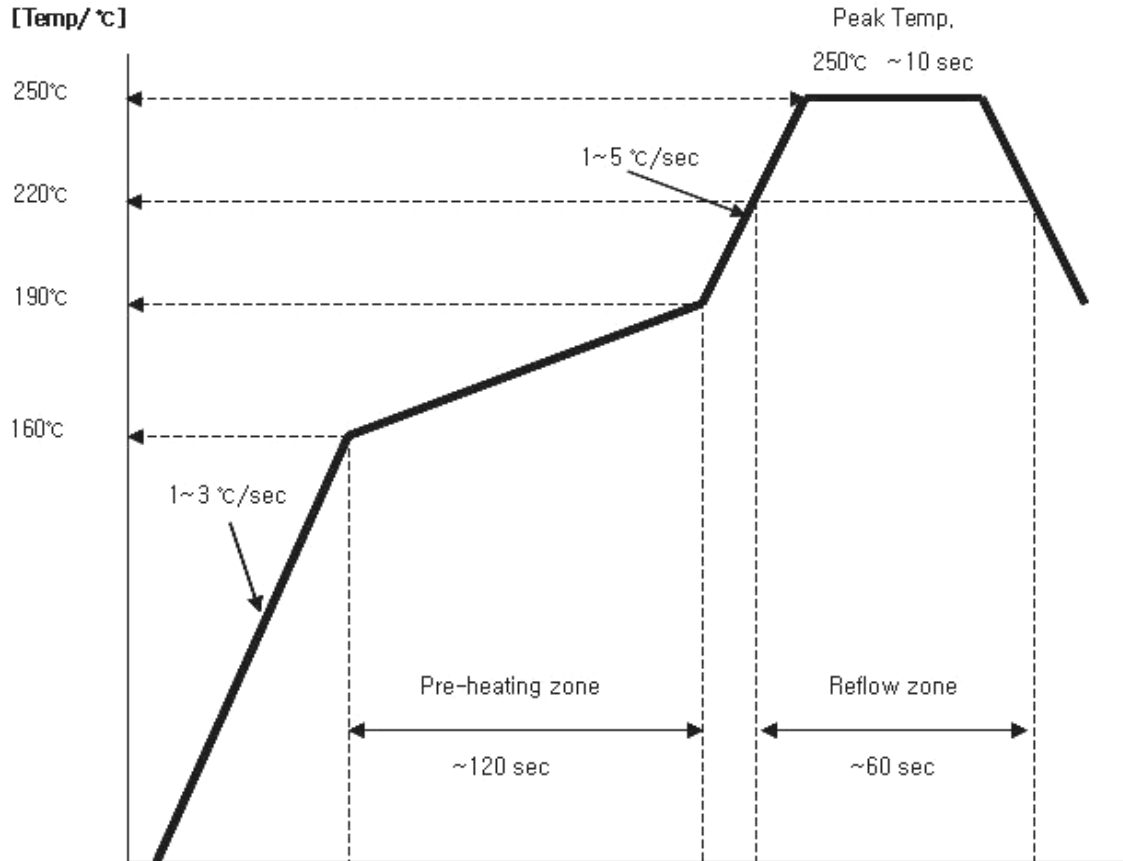

Comment) The quality is guaranteed under this temperature conditions on 2 times solder reflows

Cautions

1. This is a hermetic device.

MSL (Moisture Sensitive Level) is the 1st level

2. This is an electrostatic sensitive device. Please avoid static voltage during operation and storage.

ESD (Electrostatic Discharge) Rating is class 0. (Test : HBM-Human Body Model)

3. Ultrasonic cleaning shall be avoided.

4. This device should not be used in any type of fluid such as water, oil , organic solvent ,etc.

	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F3253	
		Rev. Date	2021-02-16	
		Rev.	NRTF03-AS03	8/8