


SAW Bandpass Filter F7661



Features

- RF bandpass filter
- Usable bandwidth 17MHz
- No matching single-ended operation
- Ceramic Surface Mounted Device (SMD) Package (3.0mm × 3.0mm)
- RoHS/RoHS2 (2015/863/EU) Compliant

Package Dimensions

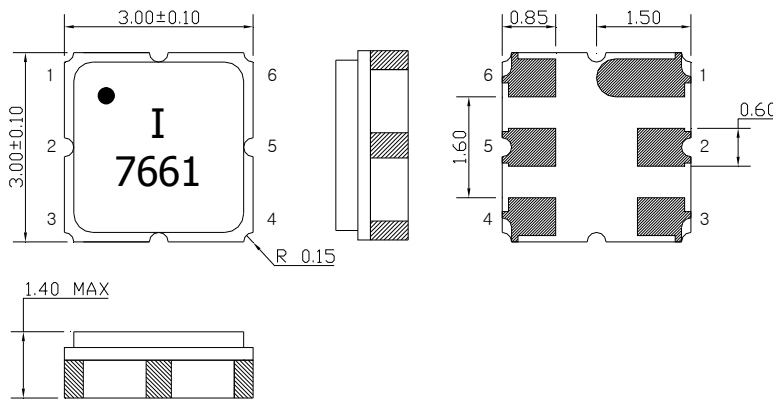

Dimensions shown are nominal in millimeters

Body : Al_2O_3 Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating $0.3 \sim 1.0$ μm , Over a $1.27 \sim 8.89$ μm
Ni Plating

Pin Configuration

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-10	25	60
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm	-	-	23

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F7661	
		Rev. Date	2019-09-16	
		Rev.	NRUH02-AS01	1/7

SAW Bandpass Filter F7661




Specifications

Fc = 766.5 MHz

		Minimum	Typical	Maximum
Center Frequency (Fc)	MHz	-	766.5	-
Insertion Loss (Fc ± 8.5MHz)	dB	-	2.0	3.5
Amplitude Ripple (Fc ± 8.5MHz)	dB	-	1.0	1.5
Absolute Attenuation				
788.0 MHz	dB	35	56	-
805.0 MHz		35	43	-
Input/Output impedance	Ohm	-	50	-

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F7661	
		Rev. Date	2019-09-16	
		Rev.	NRUH02-AS01	2/7

SAW Bandpass Filter F7661



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

●¹⁾
I²⁾
7661³⁾

1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number



* Ink or Laser Marking available


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F7661	
		Rev. Date	2019-09-16	
		Rev.	NRUH02-AS01	3/7

SAW Bandpass Filter F7661



Typical Performance (at 25°C)

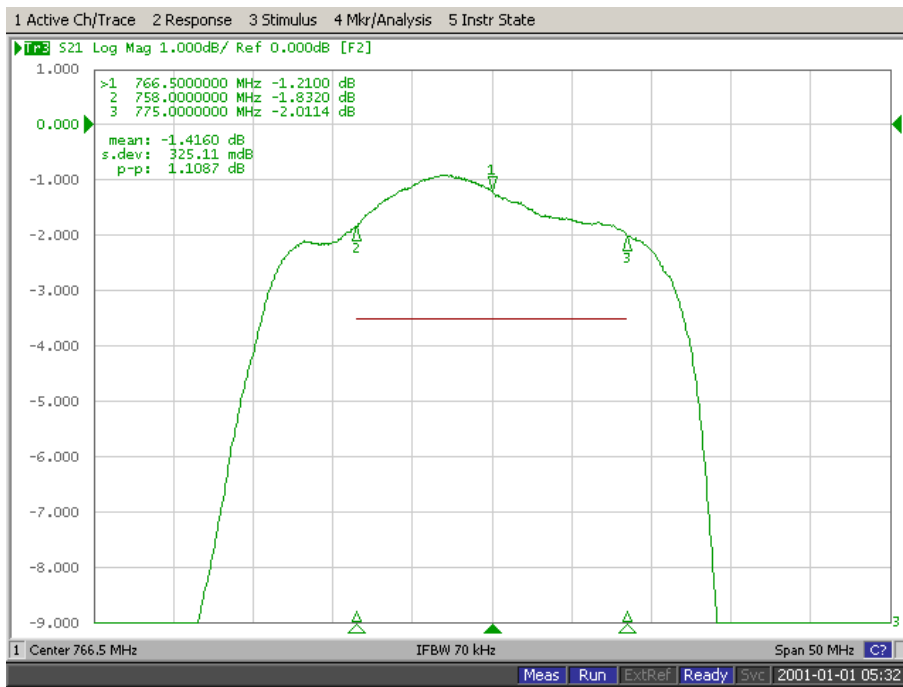
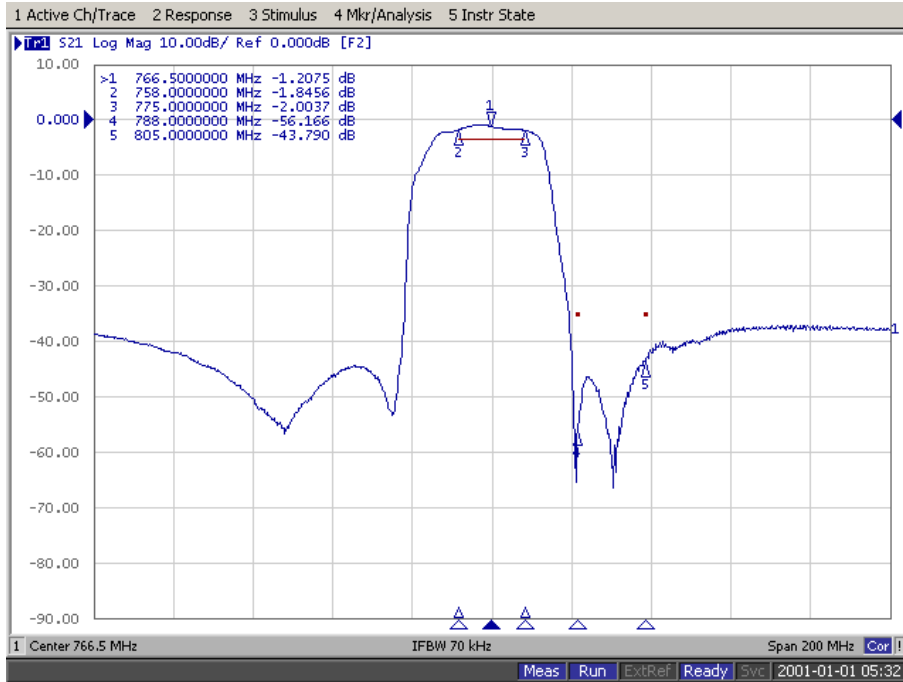


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F7661	
		Rev. Date	2019-09-16	
		Rev.	NRUH02-AS01	4/7



SAW Bandpass Filter F7661



Input / Output VSWR Charts

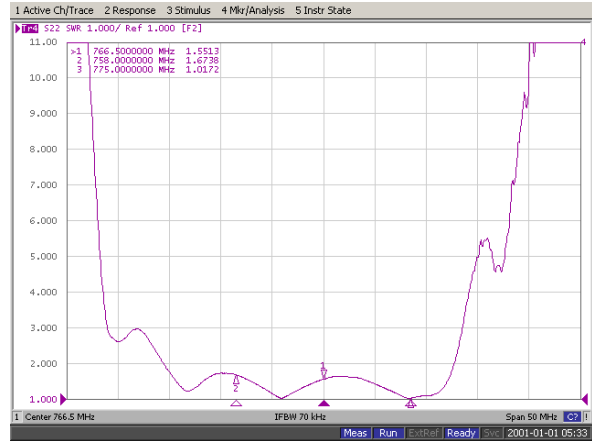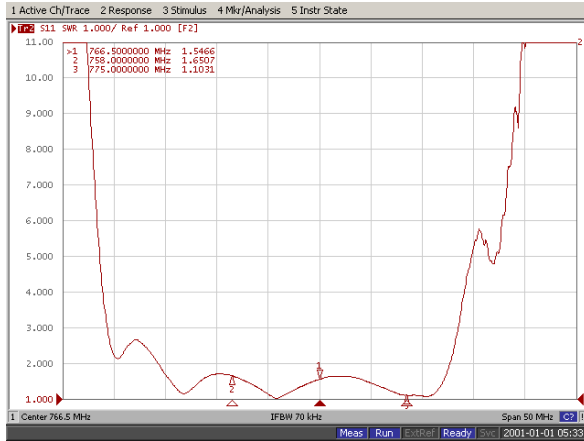

Input / Output Smith Charts

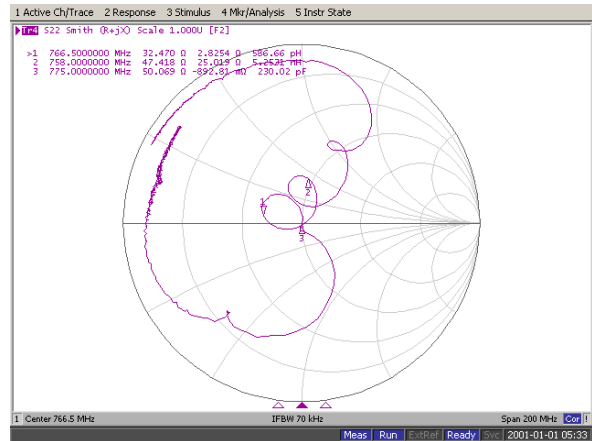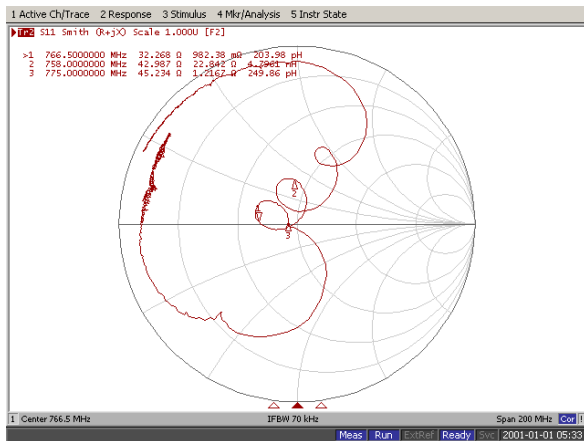


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F7661	
		Rev. Date	2019-09-16	
		Rev.	NRUH02-AS01	5/7

SAW Bandpass Filter F7661




Packing Specification

1. Reeling Quantity : 1000 pcs / reel or 3000 pcs/reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

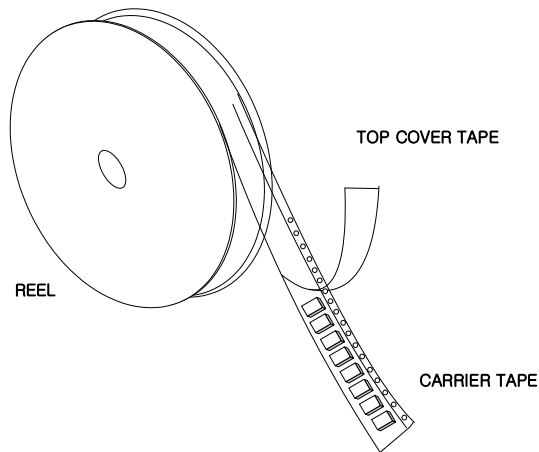

Tape Specification

1. Leader part and vacant position specification

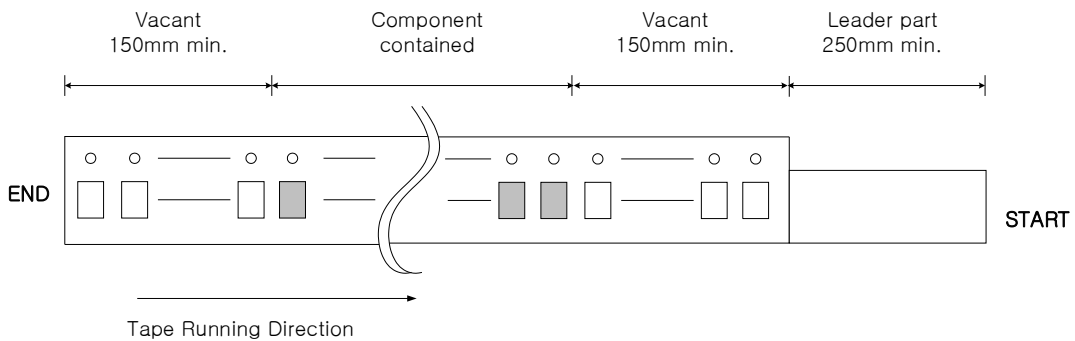


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

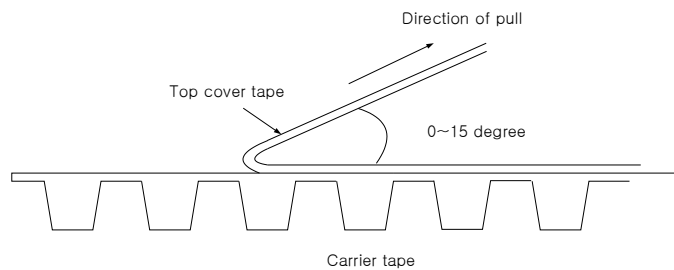


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F7661	
		Rev. Date	2019-09-16	
		Rev.	NRUH02-AS01	6/7

SAW Bandpass Filter F7661




Carrier Tape Dimensions [unit : mm]

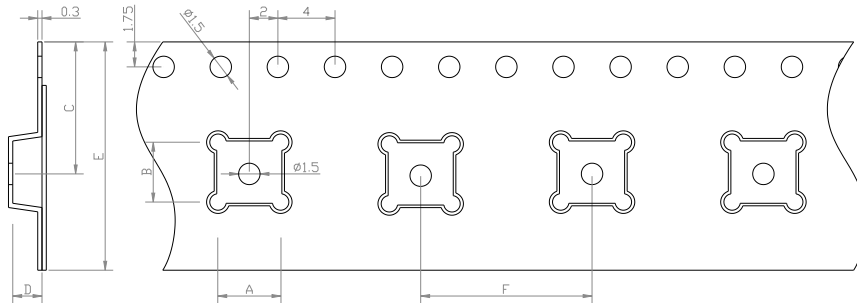


A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

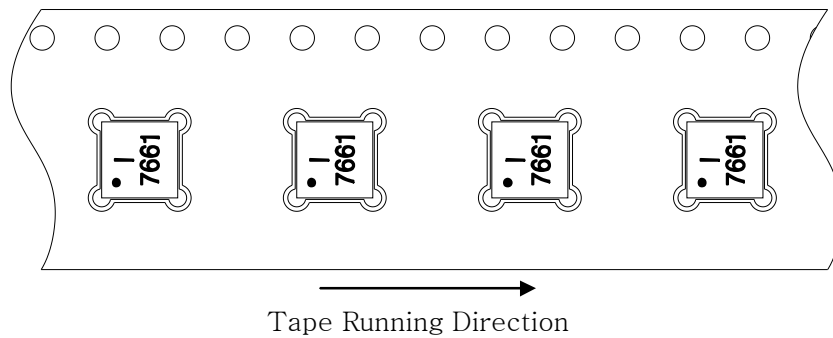

Reel Dimensions [unit : mm]

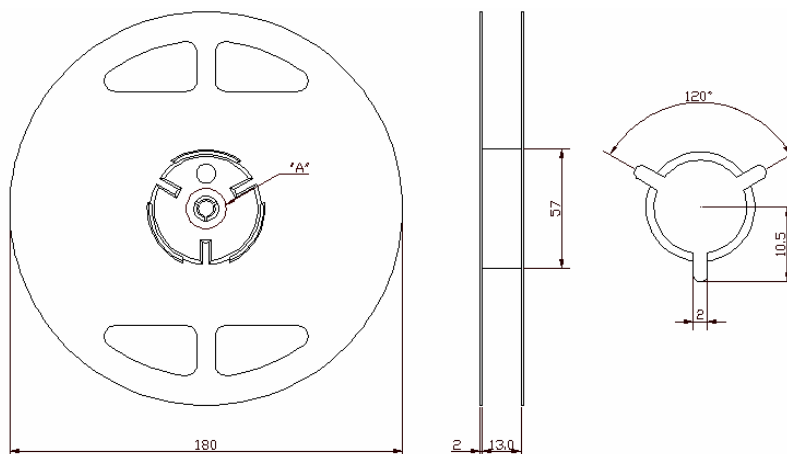

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F7661	
		Rev. Date	2019-09-16	
		Rev.	NRUH02-AS01	7/7