


SAW Bandpass Filter F4474



Features

- RF bandpass filter
- Usable bandwidth 1.0 MHz
- Ceramic Surface Mounted Device (SMD) Package (3.8mm × 3.8mm)
- RoHS/RoHS2 Compliant

Package Dimensions

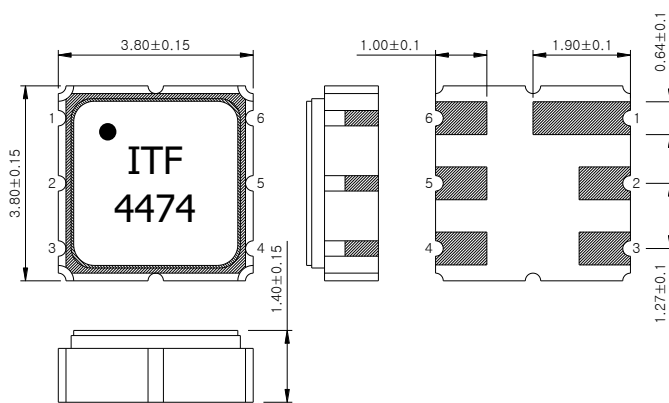


Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um Ni Plating

Recommended Footprint

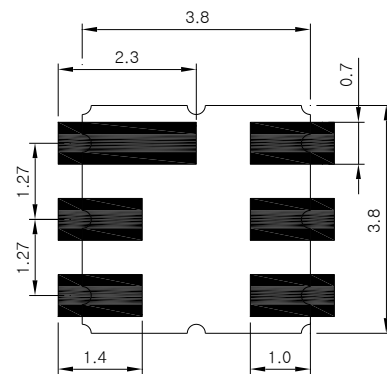


Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	25	85
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4474	
		Rev. Date	2020-03-12	
		Rev.	NRVB03-AS01	1/9

SAW Bandpass Filter F4474




Specifications

Fc = 447.0 MHz

		Minimum	Typical	Maximum
Center Frequency (Fc)	MHz	-	447.0	-
Insertion Loss (446.5 ~ 447.5 MHz)	dB	-	3.0	4.5
Amplitude Ripple (446.5 ~ 447.5 MHz)	dB	-	0.4	1.5
VSWR (446.5 ~ 447.5 MHz)			1.7	2.0
Absolute Attenuation				
Fc - 18.0MHz	dB	40	50	-
Fc - 12.0MHz		35	50	-
Fc - 5.8MHz		15	30	-
Fc + 5.8MHz		15	20	-
Fc + 12.0MHz		25	30	-
Fc + 18.0MHz		25	35	-
Input/Output impedance	Ohm	-	50	-

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances

 Integrated Technology Future	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4474	
		Rev. Date	2020-03-12	
		Rev.	NRVB03-AS01	2/9

SAW Bandpass Filter F4474



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

- 1) ●
- ITF 2)
- 4474 3)

1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number



* Ink or Laser Marking available

	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4474	
		Rev. Date	2020-03-12	
		Rev.	NRVB03-AS01	3/9

SAW Bandpass Filter F4474



Typical Performance (at 25°C)

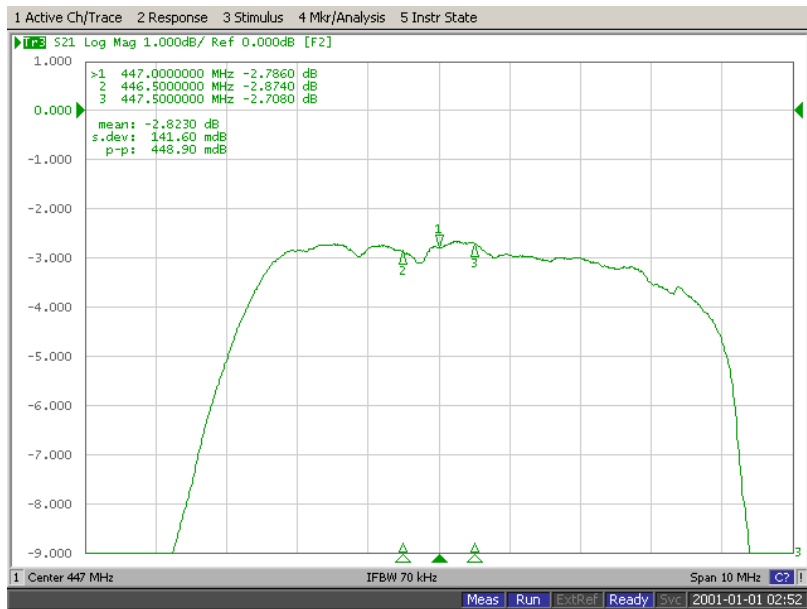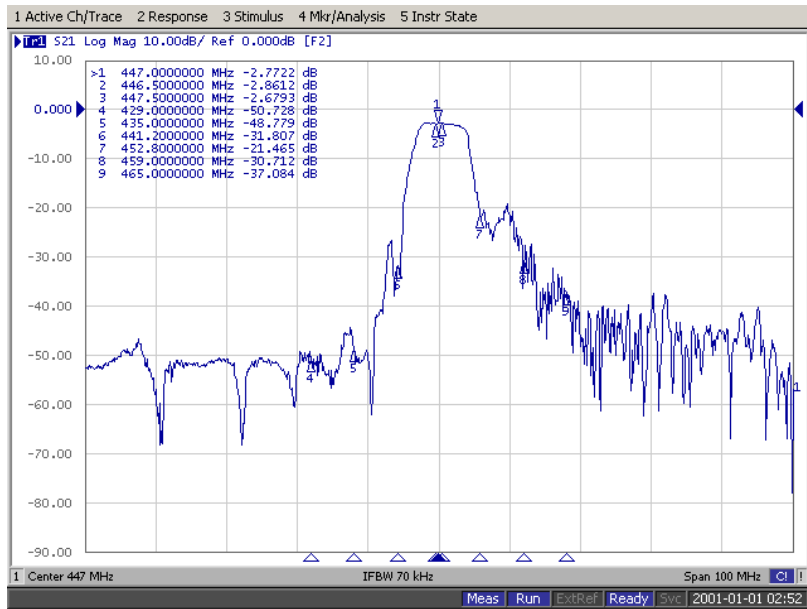


ITF Co., Ltd.
 102-901, 22, Samjak-ro, Ojeong-gu,
 Bucheon-si, Gyeonggi-do, Korea, 14501

Part No.	F4474	
Rev. Date	2020-03-12	
Rev.	NRVB03-AS01	4/9



SAW Bandpass Filter F4474



Input / Output VSWR Charts

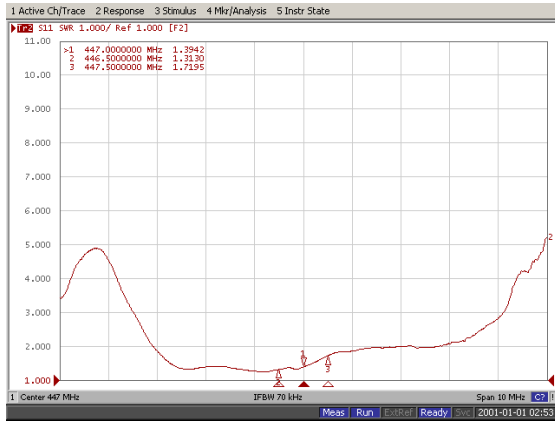

Input / Output Smith Charts

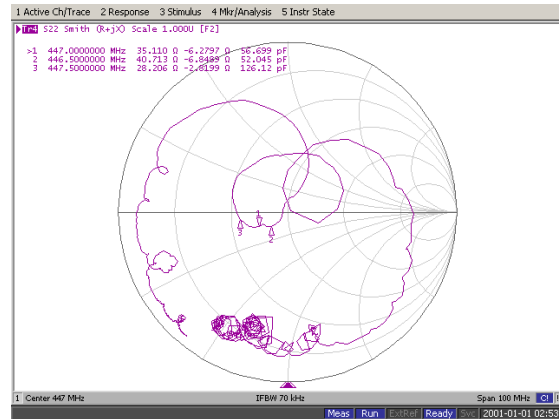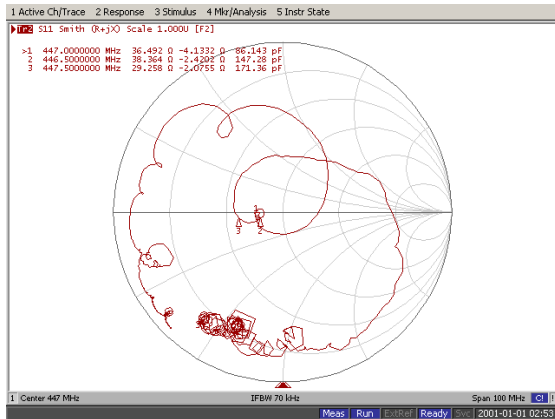


	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4474	
		Rev. Date	2020-03-12	
		Rev.	NRVB03-AS01	5/9

SAW Bandpass Filter F4474




Packing Specification

1. Reeling Quantity : 1000 pcs / reel or 3000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

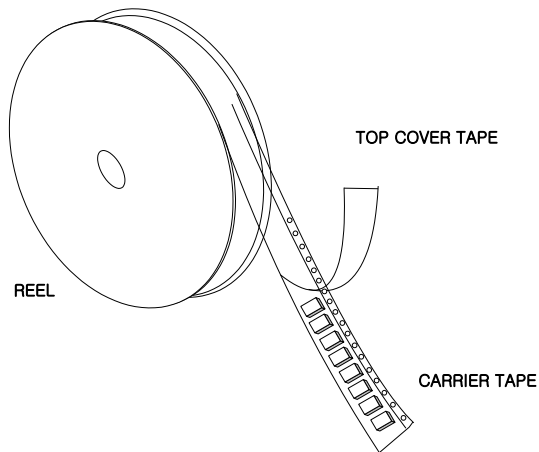

Tape Specification

1. Leader part and vacant position specification

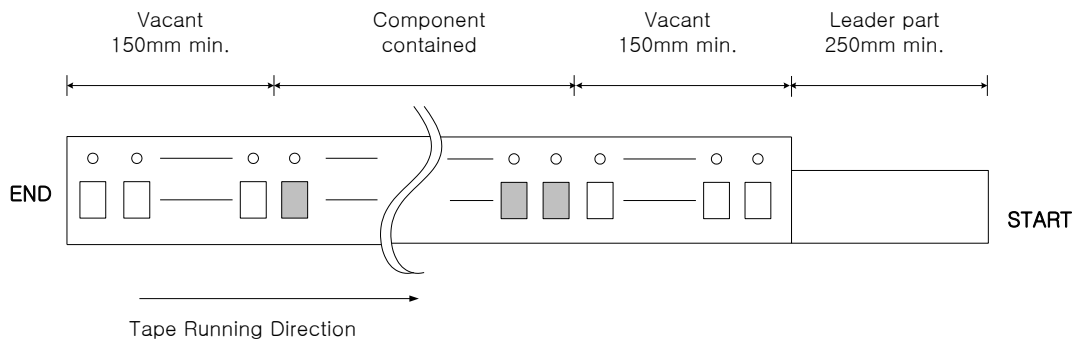



2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

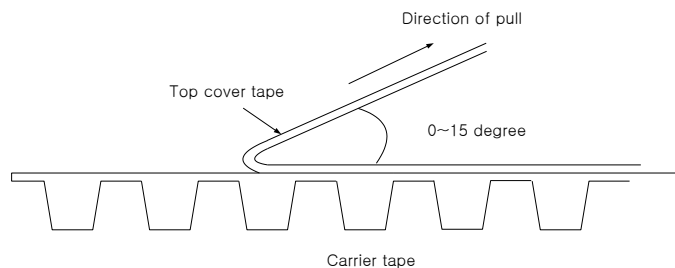


 <p>ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501</p>	Part No.	F4474	
	Rev. Date	2020-03-12	
	Rev.	NRVB03-AS01	6/9

SAW Bandpass Filter F4474




Carrier Tape Dimensions [unit : mm]

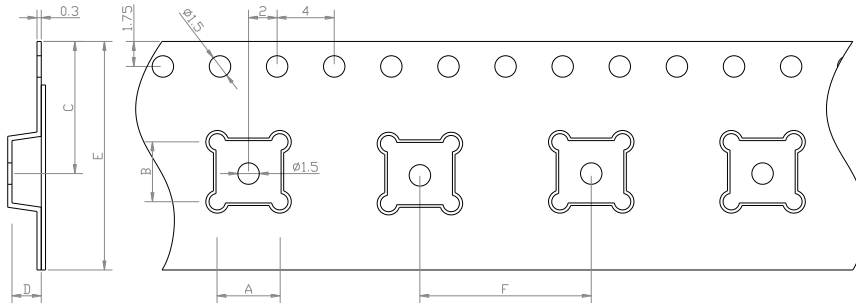



A	4.30 ± 0.1
B	4.30 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

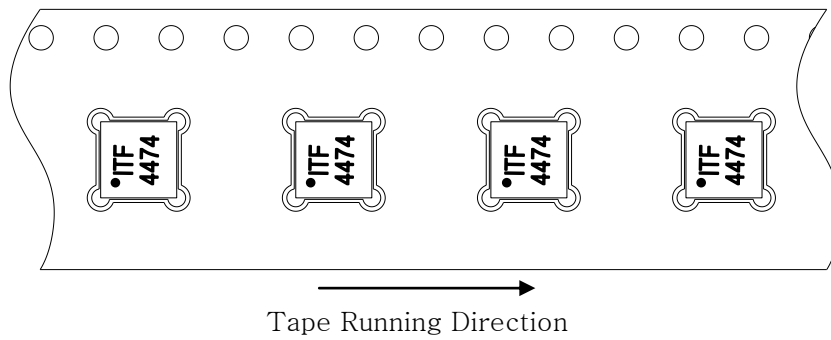

Reel Dimensions [unit : mm]

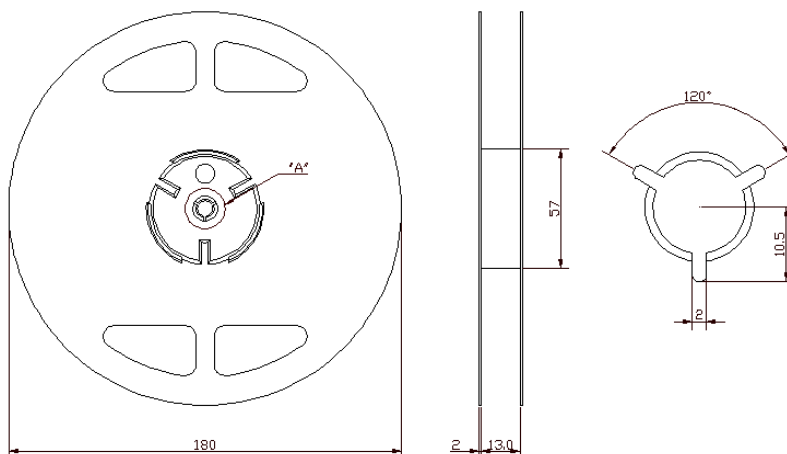

	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4474	
		Rev. Date	2020-03-12	
		Rev.	NRVB03-AS01	7/9



SAW Bandpass Filter F4474




Label Form



Packaging Box [unit : cm]

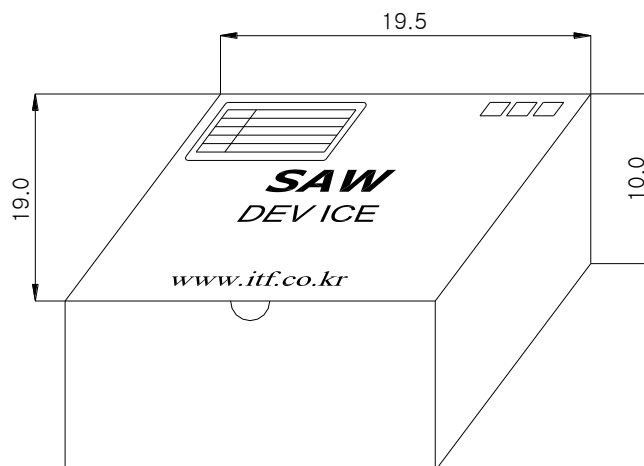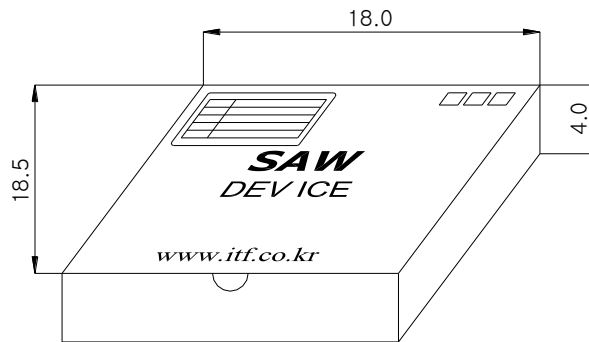


 Integrated Technology Future	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4474	
		Rev. Date	2020-03-12	
		Rev.	NRVB03-AS01	8/9

SAW Bandpass Filter F4474



Reflow Condition

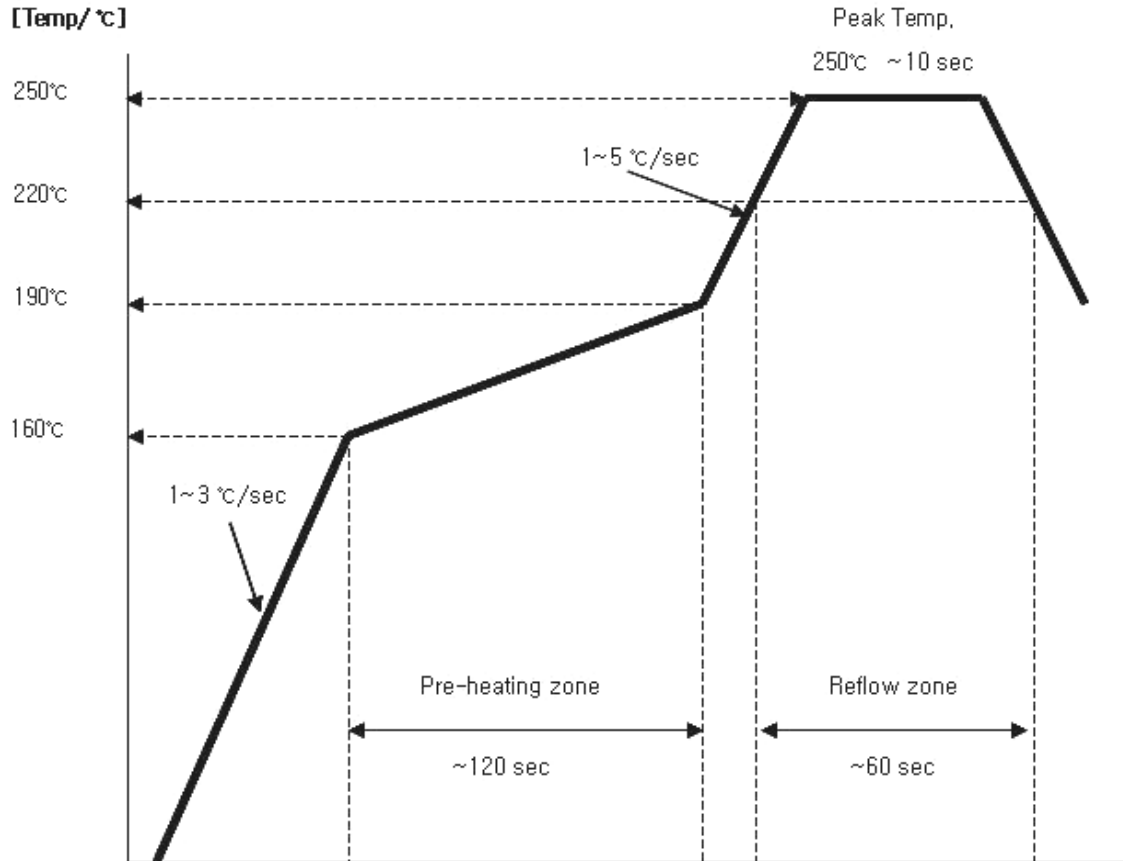

Comment) The quality is guaranteed under this temperature conditions on 2 times solder reflows

Cautions

1. This is a hermetic device.

MSL (Moisture Sensitive Level) is the 1st level

2. This is an electrostatic sensitive device. Please avoid static voltage during operation and storage.

ESD (Electrostatic Discharge) Rating is class 0. (Test : HBM-Human Body Model)

3. Ultrasonic cleaning shall be avoided.

4. This device should not be used in any type of fluid such as water, oil , organic solvent ,etc.

	ITF Co., Ltd. 102-901, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4474	
		Rev. Date	2020-03-12	
		Rev.	NRVB03-AS01	9/9