


# SAW Bandpass Filter F4133



## Features

- RF SAW Bandpass Filter
- Passband 1.0MHz
- Ceramic Surface Mounted Device (SMD) Package
- RoHS/RoHS2 Compliant

## Package Dimensions

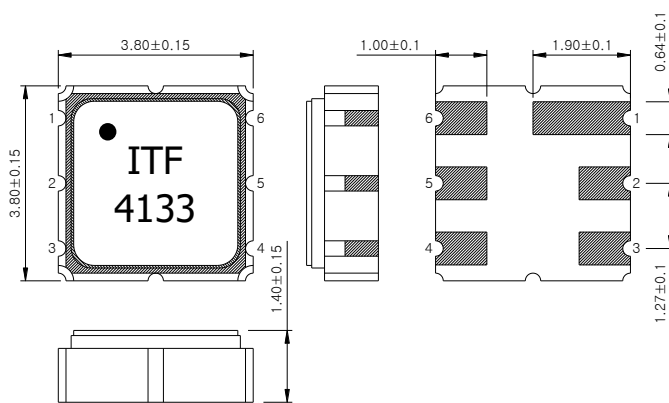

Dimensions shown are nominal in millimeters

Body : Al<sub>2</sub>O<sub>3</sub> Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um Ni Plating

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Ground

## Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-20		60
Storage Temperature Range	°C	-20	-	70
DC Voltage	V	-	-	7.5
Power Handling Capability	dBm	-	-	20

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-701, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4133	
		Rev. Date	2020-07-08	
		Rev.	NRVG01-AS01	1/8

# SAW Bandpass Filter F4133




## Specifications

Fc = 413.9 MHz

		Minimum	Typical	Maximum
Center Frequency ( Fc )	MHz	-	413.9	-
Insertion Loss ( Fc ± 0.5MHz )	dB	-	1.7	3.0
Amplitude Ripple ( Fc ± 0.5MHz )	dB	-	0.2	1.5
Absolute Attenuation				
392.5 MHz	dB	50	60	-
435.3 MHz		50	60	-
Input/Output impedance	Ohm	-	50	-

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances


 Integrated Technology Future	<b>ITF Co., Ltd.</b> 102-701, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4133	
		Rev. Date	2020-07-08	
		Rev.	NRVG01-AS01	2/8

# SAW Bandpass Filter F4133



## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )

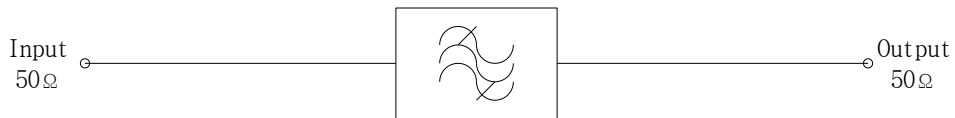

## Marking Configuration

●<sup>1)</sup>  
ITF<sup>2)</sup>  
4133<sup>3)</sup>

1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number



\* Ink or Laser Marking available


	<b>ITF Co., Ltd.</b> 102-701, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4133	
		Rev. Date	2020-07-08	
		Rev.	NRVG01-AS01	3/8

# SAW Bandpass Filter F4133



## Typical Performance ( at 25°C )

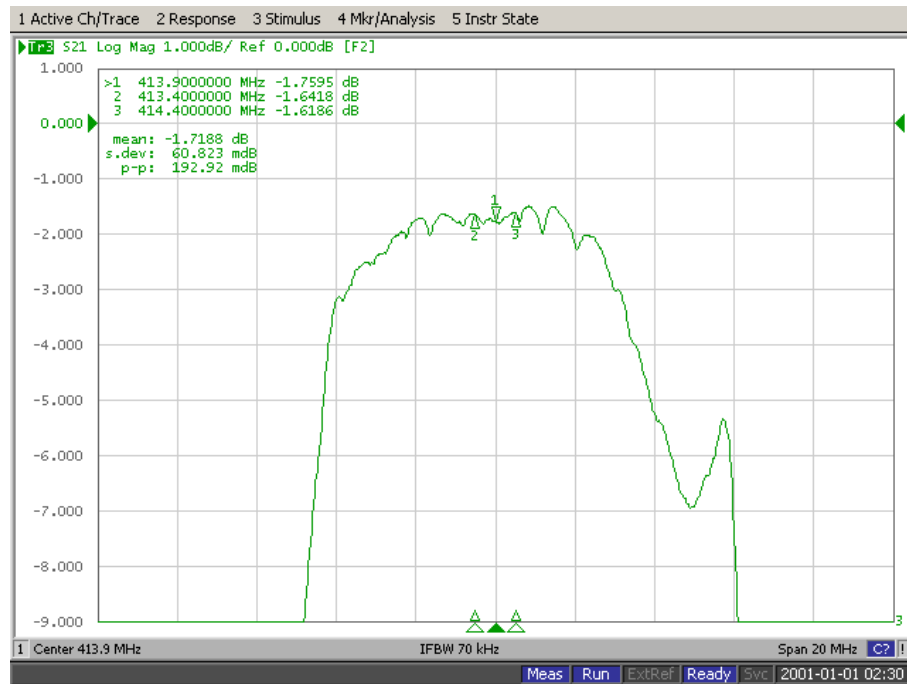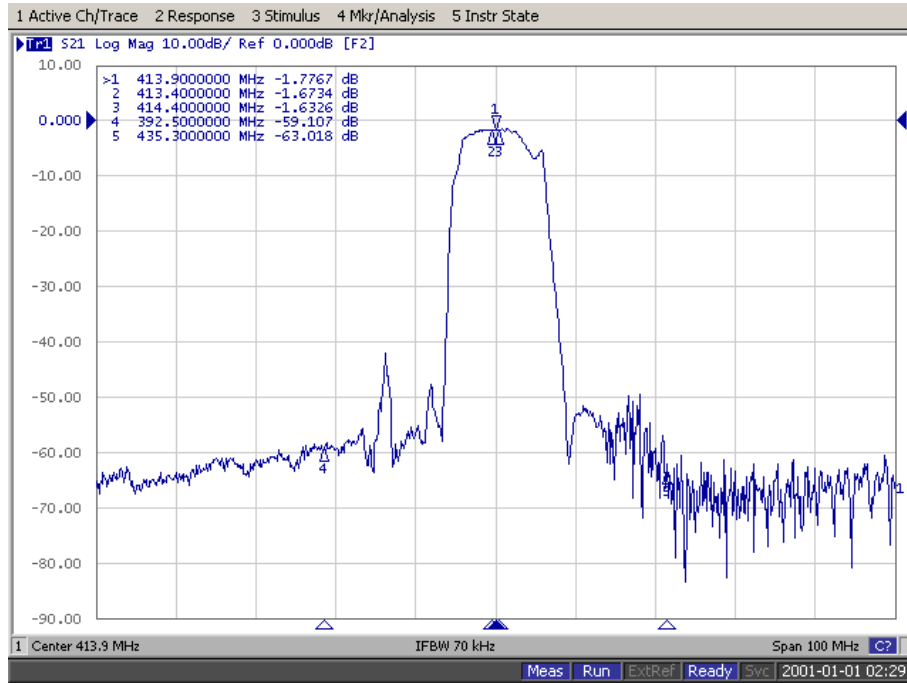


	<b>ITF Co., Ltd.</b> 102-701, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4133	
		Rev. Date	2020-07-08	
		Rev.	NRVG01-AS01	4/8


# SAW Bandpass Filter F4133



## Input / Output VSWR Charts

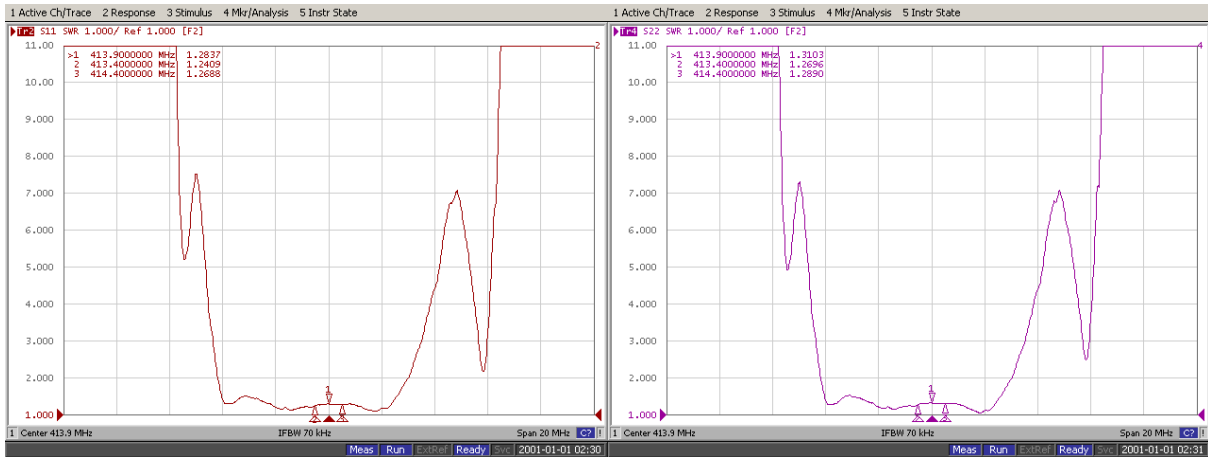

## Input / Output Smith Charts

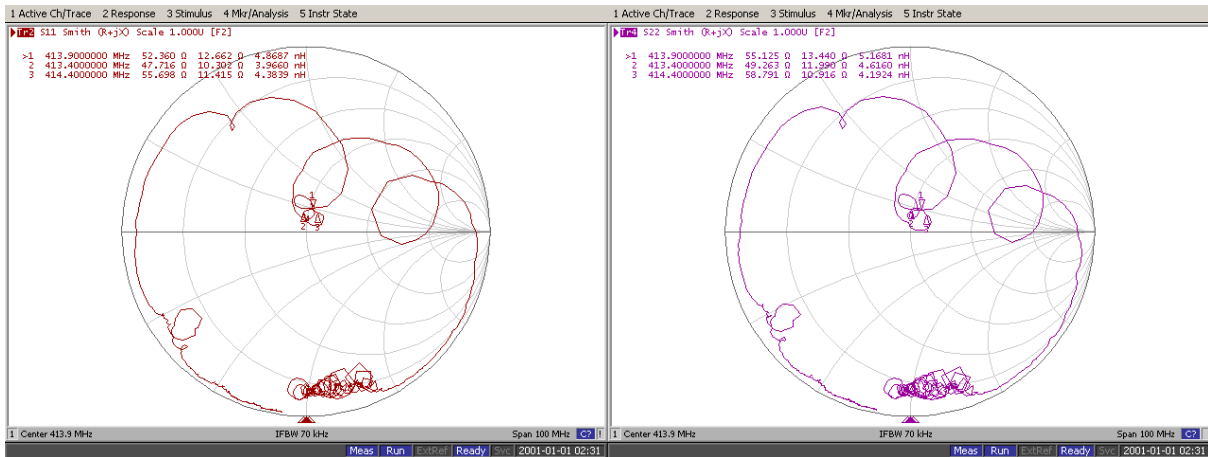


	<b>ITF Co., Ltd.</b> 102-701, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4133	
		Rev. Date	2020-07-08	
		Rev.	NRVG01-AS01	5/8

# SAW Bandpass Filter F4133




## Packing Specification

1. Reeling Quantity : 1000 pcs / reel or 3000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

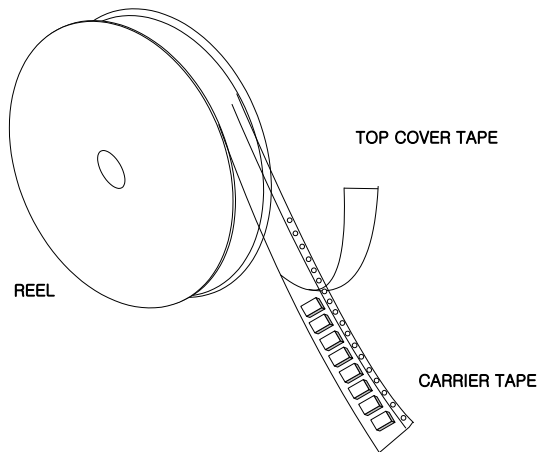

## Tape Specification

1. Leader part and vacant position specification

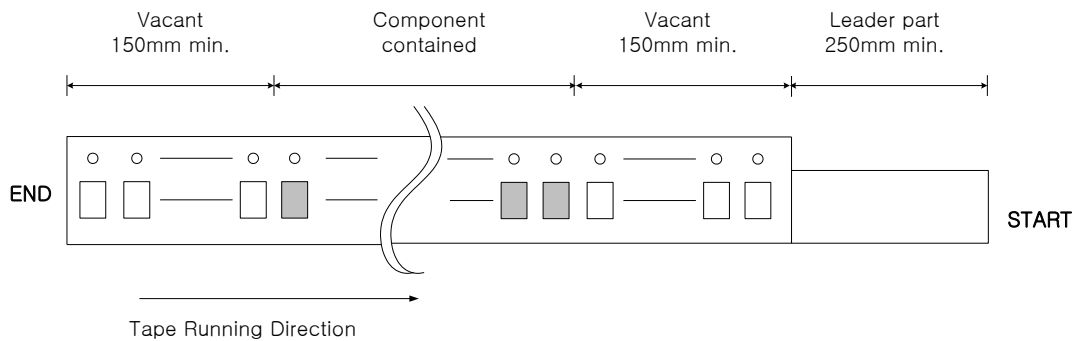


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

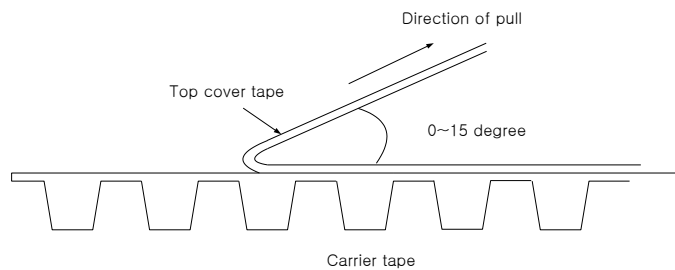


	<b>ITF Co., Ltd.</b> 102-701, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4133	
		Rev. Date	2020-07-08	
		Rev.	NRVG01-AS01	6/8

# SAW Bandpass Filter F4133




## Carrier Tape Dimensions [unit : mm]

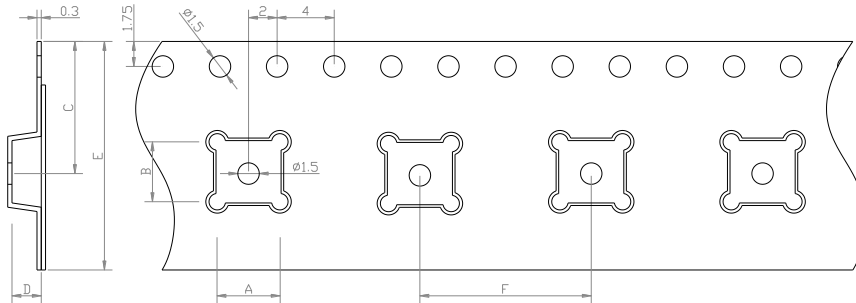


A	4.30 ± 0.1
B	4.30 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

## Part Direction

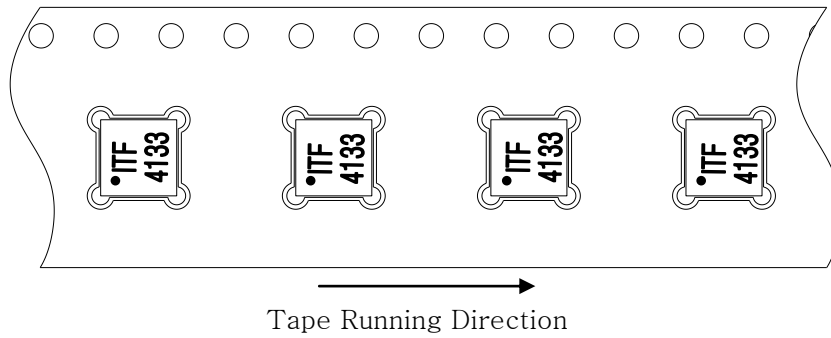

## Reel Dimensions [unit : mm]

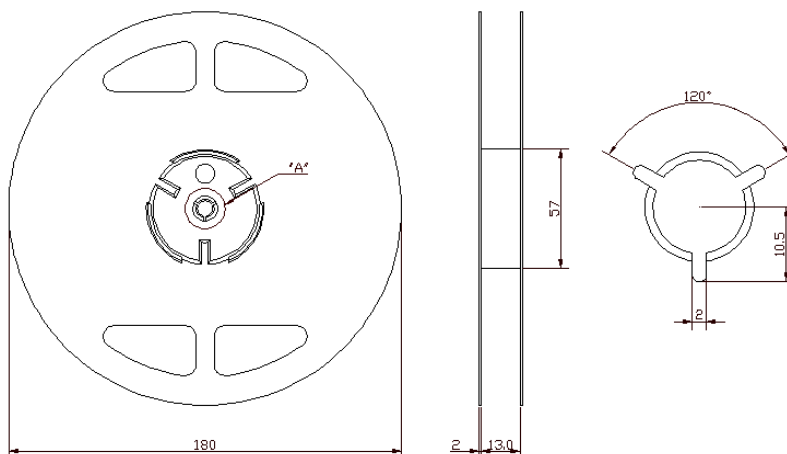


	<b>ITF Co., Ltd.</b> 102-701, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4133	
		Rev. Date	2020-07-08	
		Rev.	NRVG01-AS01	7/8

# SAW Bandpass Filter F4133



## Reflow Condition

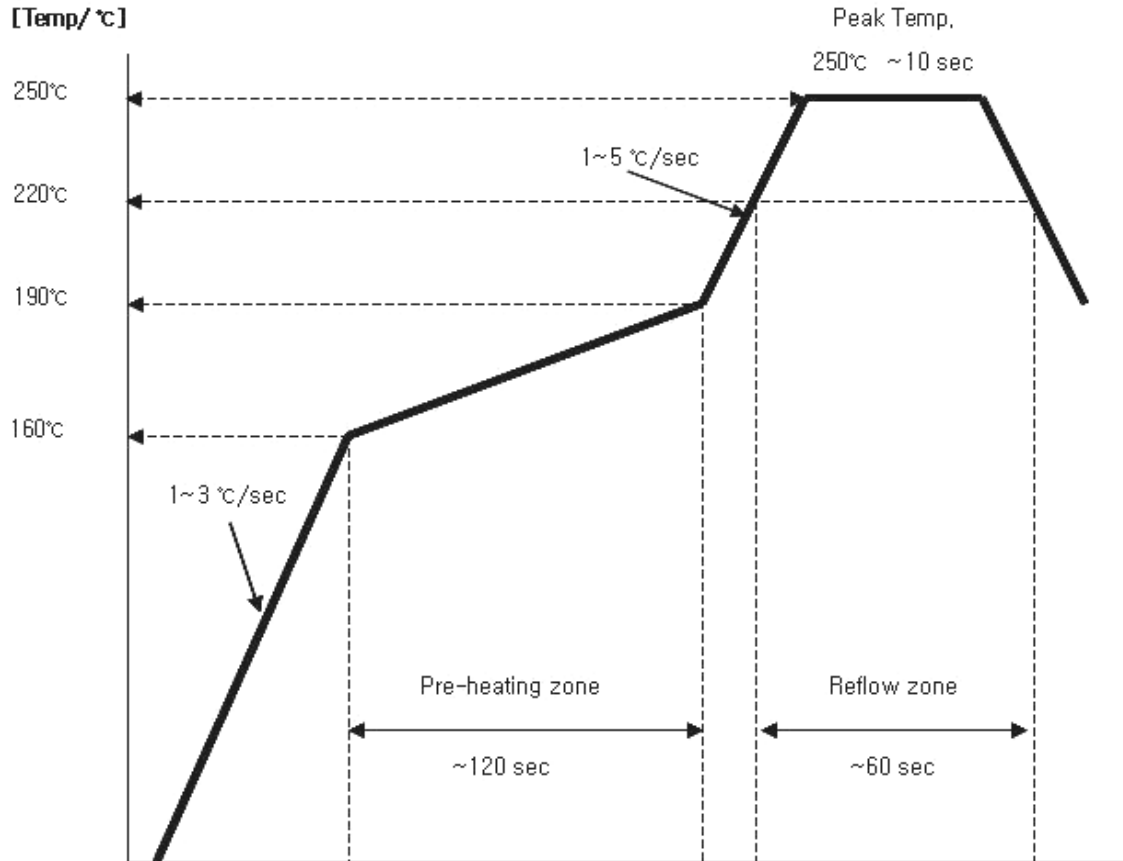

Comment) The quality is guaranteed under this temperature conditions on 2 times solder reflows

## Cautions

1. This is a hermetic device.

MSL (Moisture Sensitive Level) is the 1st level

2. This is an electrostatic sensitive device. Please avoid static voltage during operation and storage.

ESD (Electrostatic Discharge ) Rating is class 0. (Test : HBM-Human Body Model)

3. Ultrasonic cleaning shall be avoided.

4. This device should not be used in any type of fluid such as water, oil , organic solvent ,etc.

	<b>ITF Co., Ltd.</b> 102-701, 22, Samjak-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea, 14501	Part No.	F4133	
		Rev. Date	2020-07-08	
		Rev.	NRVG01-AS01	8/8