

1. Features

- Typical 1dB bandwidth of 4.7 MHz
- High attenuation
- Single Ended Operation
- Dual In-line Package (DIP)

RoHS Compliant


Tested by SGS Testing Korea

2. Electrical Specifications

Source and Load Impedance = 50Ω

Room Temperature : +25°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	50.0	-
Insertion Loss	dB	-	26.5	28.0
1dB Bandwidth	MHz	4.6	4.75	-
3dB Bandwidth	MHz	-	5.03	-
40dB Bandwidth	MHz	-	6.09	6.25
Amplitude Ripple (fo ± 2.2 MHz)	dB	-	0.35	1.0
Group Delay Variation (fo ± 2.2 MHz)	nsec	-	60	200
Absolute Delay	usec	-	3.95	4.0
Ultimate Rejection	dB	50	52	-
Temperature Coefficient of Frequency	ppm/°C	-	-18	-


D3512 Package Dimension

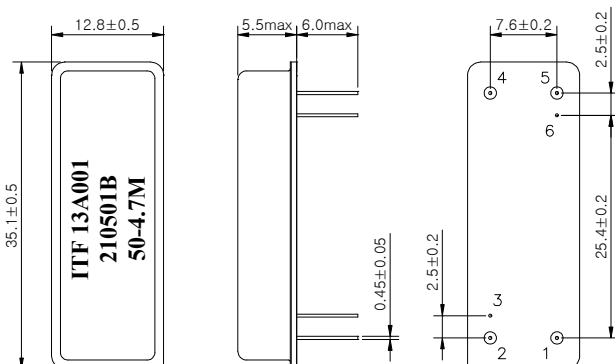

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Matching Schematic

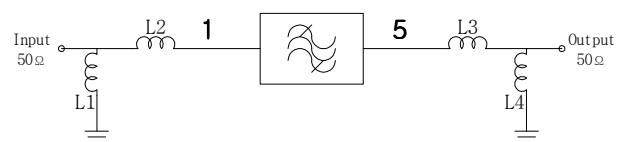

$$L1 = L4 = 150\text{nH}, L2 = L3 = 120\text{nH}$$

Pin Configuration

	1	Ground	2,4
Input			
Output	5	Others	Ground

3. Typical Performance (at +25°C)

